


# THE DIRECTOR PRO ACTIVE EXT FLUSH

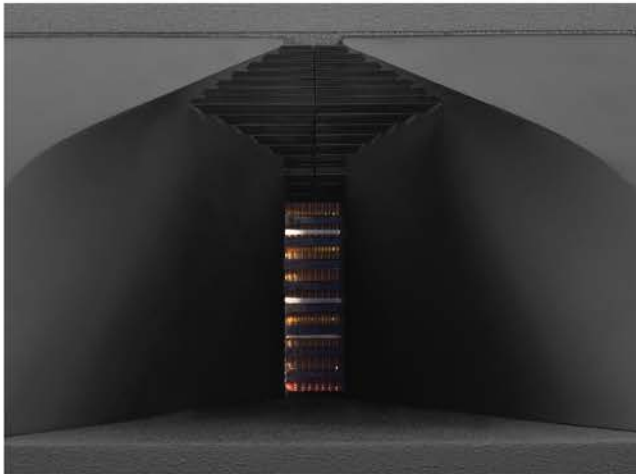

Speaker type   Loudspeaker	Asymmetrical Waveguide Design with 8" AMT and a single or double 10" mid woofer   Asymmetrische Schallführung mit 200 mm AMT und einem oder zwei 254 mm Tiefmitteltöner
Passive   Active	Active, 2Ch DSP + 2Ch Amplifier are required   Aktiv, 2Ch DSP + 2Ch Verstärker werden benötigt
Recommended Amplifiers   Empfohlene Verstärker	low-mid 71 Vrms, 100 Vpk, 8.9 A; high 62 Vrms, 88 Vpk, 3.9 A; equivalent to LF 630W@8Ω, HF 240W@ 16Ω
Recommended ASCENDO Amplifiers	DNA 2250.2
Enclosure type   Prinzip	Vented   Reflex
Peak output   Spitzenleistung	127 dB peak / 1 x Director sub 130 dB peak / 2 x Director sub 105 dB peak / AMT Waveguide
Frequency Range   Frequenzbereich	78 Hz - 21 kHz / -3 dB
Woofer   Tieftöner	10"   254 mm
Tweeter   Hochtöner	8" AMT
Speaker In Waveguide	Neutrik Speakon NL4
Speaker In Director Sub	Neutrik Speakon NL4
Enclosure   Gehäuse	Internally braced birch ply and MDF   Innerverstrebtes Birkensperholz und MDF
Waveguide Width	17.25"   438.8 mm
Waveguide Height	8.81"   223.8 mm
Waveguide Depth	21.91"   556.5 mm
Waveguide Weight	23,15 lbs   10,5 kg

Director Sub Width	12,2"   310 mm
Director Sub Height	12,6"   320 mm
Director Sub Depth	13,39"   340 mm
Director Sub Weight	18,74 lbs   8,5 kg
Finish   Oberfläche	PU structural paint   Robuster Strukturlack schwarz
Mounting Waveguide   Montage Waveguide	2 x metal mounting brackets
Mounting Director Sub   Montage Director Sub	2 x metal mounting brackets

Technical modifications subject to change without further notice | Technische Änderungen vorbehalten

