

TECHNICAL DATA


THE 8

PRO ACTIVE LED

WEDGE



Speaker Type	3" compression driver, 8" coax mid with proprietary waveguide & LF: 2 x 8"
Principle	Vented
Passive Active	Passive
Woofers	Dual 8", horizontal D'Appolito layout
Tweeter	3" compression driver on proprietary waveguide (coax with 8" mid)
Recommended ASCENDO Amplifiers	DSP ULN2-2604 D, ULN3-6004
SPL (Half Space 2pi)	Calculated data 131 dB (Cont.) / "TBA" dB (Peak)
Frequency Range	Calculated Data 75 Hz – 21 kHz (–3 dB)
Impedance	4 Ω nominal
Directivity Horizontal x Vertical in deg°	100° x 60°
Input Terminal	Neutrik Speakon®

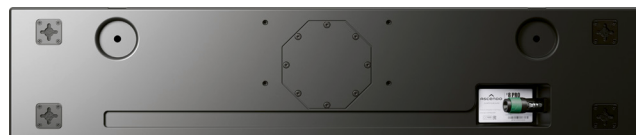

Enclosure	Internally braced MDF
Dimensions (W/H/D)mm	1030 220 165.5
Dimensions (W/H/D)inch	40 9/16 8 11/16 6 1/2
Packing Dimensions (W/H/D)mm	1140 330 280
Packing Dimensions (W/H/D)inch	44 7/8 13 11
Weight	48.50 lbs 22 kg
Gross Weight	55.16 lbs 25 kg
Finish	Satin matte black
Mounting	Keyhole hangers (H/V); side V-brackets (2-axis aiming); 90° bayonet invisible mount (tight-access); recessed cable groove



Technical modifications subject to change without further notice | Technische Änderungen vorbehalten