

Architectural Series RETAIL Price List - Valid From May 2020

6.5" In-Ceiling Loudspeakers

Includes Both Round and Square Zero-Bezel
Magnetic Grilles (C263 supplied with round grille only)
Round Grille Finished Dimension (D): 231 mm
Square Grille Finished Dimensions (H x W):
231 mm x 231 mm
Cutout Dimensions (D): 203 mm

C-2 Installation Mechanism
Compatible with Wall Material Thickness Range:
13 - 50 mm
Preconstruction Bracket and Fire-Rated
Back-Box Accessories Available

C263 (each)

6.5" Aluminium Cone, Cast-Polymer Frame Woofer
1" Aluminium-Dome Swiveling Tweeter with Waveguide
Sensitivity: 86dB @ 2.83V, 1m
Recommended Amplifier Power Range: 10 - 100W
Mounting Depth: 120 mm
Weight: 1.4 kg / Shipping Weight: 2.1 kg



Retail
Ex VAT
£ 137.50

Retail
Inc VAT
£ 165.00

C363 (each)

6.5" Micro-Ceramic Composite (MCC) Cone,
Cast-Polymer Frame Woofer
1" Aluminium-Dome Swiveling Tweeter with
Waveguide
Sensitivity: 87dB @ 2.83V, 1m
Recommended Amplifier Power Range: 10 - 120W
Mounting Depth: 122 mm
Weight: 0.8 kg / Shipping Weight: 1.1 kg


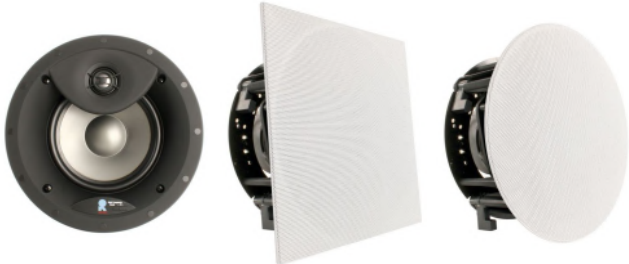




£ 229.17

£ 275.00

Architectural Series RETAIL Price List - Valid From May 2020

6.5" In-Ceiling Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>C563 (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame Woofer 1" Aluminium-Dome Swiveling Tweeter with Waveguide 3-Position HF Level Control Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 130W Mounting Depth: 125 mm Weight: 0.9 kg / Shipping Weight: 1.2 kg</p>	£ 320.83	£ 385.00
		
<p>C763 (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control LF Boundary Gain Compensation Sensitivity: 88dB @ 2.83V Recommended Amplifier Power Range: 10 - 140W Mounting Depth: 125 mm Weight: 1.1 kg / Shipping Weight: 1.5 kg</p>	£ 458.33	£ 550.00
		
<p>C363DT Dual Tweeter Loudspeakers (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Polymer Frame Woofer Two 1" Aluminium-Dome Tweeters with Waveguides Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 120W Mounting Depth: 122 mm Weight: 0.9 kg / Shipping Weight: 1.2 kg</p>	£ 275.00	£ 330.00
		
<p>C563DT (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame Woofer Two 1" Aluminium-Dome Tweeters with Waveguides 3-Position HF Level Control Sensitivity: 88dB @ 2.83, 1 m Recommended Amplifier Power Range: 10W - 130W Mounting Depth: 125 mm Weight: 1 kg / Shipping Weight: 1.4 kg</p>	£ 366.67	£ 440.00
		

Architectural Series RETAIL Price List - Valid From May 2020

8" In-Ceiling Loudspeakers

Includes Both Round and Square Zero-Bezel Magnetic

Grilles (C283 supplied with round grille only)

Round Grille Finished Dimension

(D): 272 mm

Square Grille Finished Dimensions

(H x W): 272 mm x 272 mm

Cutout Dimensions (D): 244 mm

C-2 Installation Mechanism

Compatible with Wall Material Thickness Range:

13 - 25 mm

Preconstruction Bracket and Fire-Rated

Back-Box Accessories Available

C283 (each)

8" Aluminium Cone, Cast-Polymer Frame Woofer

1" Aluminium-Dome Swiveling Tweeter with Waveguide

Sensitivity: 87dB @ 2.83V, 1m

Recommended Amplifier Power Range: 10 - 100W

Mounting Depth: 130 mm

Weight: 1.8 kg / Shipping Weight: 2.71 kg

Retail
Ex VAT

£ 183.33

Retail
Inc VAT

£ 220.00



C383 (each)

8" Micro-Ceramic Composite (MCC) Cone,
Cast-Polymer Frame Woofer

1" Aluminium-Dome Swiveling Tweeter with Waveguide

Sensitivity: 87dB @ 2.83V, 1 m

Recommended Amplifier Power Range: 10 - 125W

Mounting Depth: 132 mm

Weight: 1 kg / Shipping Weight: 1.4 kg

£ 320.83

£ 385.00



Architectural Series RETAIL Price List - Valid From May 2020

8" In-Ceiling Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>C583 (each) 8" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame Woofer 1" Aluminium-Dome Swiveling Tweeter with Waveguide 3-Position HF Level Control Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 135W Mounting Depth: 132 mm Weight: 1.3 kg / Shipping Weight: 1.7 kg</p>	£ 412.50	£ 495.00
		
<p>C783 (each) 8" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control LF Boundary Gain Compensation Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 150W Mounting Depth: 132 mm Weight: 1.4 kg / Shipping Weight: 1.9 kg</p>	£ 550.00	£ 660.00
		



Architectural Series RETAIL Price List - Valid From May 2020

Special In-Ceiling Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>C540 (each)</p> <p>4" Aluminium Cone, Cast-aluminium Frame Woofer 25mm Aluminium Dome Swiveling Tweeter with Waveguide 3-position HF Level Control Mounting Depth: 84mm Recommended Amplifier Power Range: 10 - 80 W Sensitivity: 85dB @ 2.83V, 1m Nominal Impedance: 8Ω Weight: 0.7 kg / Shipping Weight: 0.9 kg Cutout Dimensions (Dia.): 89 mm Includes Both Round and Square Zero-bezel Magnetic Grilles Round Grille Finished Dimension (Dia.): 112 mm Square Grille Finished Dimensions (H x W): 112 mm x 112 mm RollerLock Tool-free Installation Mechanism Compatible with Boundary Material Thickness Range: 13 - 23 mm Rough-in Bracket (RIB) accessory available (PCK4C) Fire-rated Back-box (FBB) accessory available (FBB4C)</p>	£ 229.17	£ 275.00
<p>C763L (each)</p> <p>7.8" x 3.4" Micro-Ceramic Composite (MCC) Diaphragm Flat-Panel Woofer Two 3.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Midranges 1" Aluminium High-Output Tweeter with Waveguide 3-Position HF Level Control LF Boundary Gain Compensation Sensitivity: 86dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 200W Mounting Depth: 145 mm Weight: 1.8 kg / Shipping Weight: 2.4 kg Cutout Dimensions (Diameter): 287 mm Includes Both Round and Square Zero-Bezel Magnetic Grilles Round Grille Finished Dimension (Diameter): 318 mm Square Grille Finished Dimensions (H x W mm): 318 x 318 Compatible with wall material thickness range: 13 - 25 mm Preconstruction Bracket and Fire-Rated Back-Box Accessories Available</p>	£ 687.50	£ 825.00



Architectural Series RETAIL Price List - Valid From May 2020

Extreme Climate Waterproof Marine Grade In-Ceiling Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>C363XC (each) 6.5" Flush-Mount Aluminum Cone, Cast-polymer Frame Woofer Extreme Climate Loudspeakers 1" Black Aluminum Dome Tweeter with Waveguide Mounting Depth: 69.1 mm Weight: 1.41 kg / Shipping Weight: 2.1 kg Includes extreme climate round zero-bezel magnetic grille Round Grille Finished Dimension (Diameter): 231 mm Cutout Dimensions (Diameter): 203 mm Nominal impedance: 8Ω Recommended amplifier power range: 10 - 100W Sensitivity: 85dB @ 2.83V, 1 m Frequency Range: -3 dB from 50 - 15 kHz; -10dB from 36 - 18 kHz IP 65 Rating</p>	£ 229.17	£ 275.00
		
<p>6" Round / Square XC Weatherproof Grille (Fits all Revel 6" In-ceiling models)</p>	£ 50.00	£ 60.00
<p>C383XC (each) 8" Flush-Mount Aluminum Cone, Cast-polymer Frame Woofer Extreme Climate Loudspeakers 1" Black Aluminum Dome Tweeter with Waveguide Mounting depth: 68.3 mm Deep Weight: 1.8 kg / Shipping Weight: 2.7 kg Includes extreme climate round zero-bezel magnetic grille Round grille finished dimension (Diameter): 272 mm Cutout dimensions (Diameter): 244 mm Nominal impedance: 8Ω Recommended amplifier power range: 10 - 100W Sensitivity: 87dB @ 2.83V, 1m Frequency Range -3 dB from 45 - 15 kHz; -10dB from 33 - 18 kHz IP 65 Rating</p>	£ 275.00	£ 330.00
		
<p>8" Round / Square XC Weatherproof Grille (Fits all Revel 8" In-ceiling models)</p>	£ 50.00	£ 60.00

Architectural Series RETAIL Price List - Valid From May 2020

6.5" In-Wall Loudspeakers

Includes Zero-Bezel Magnetic Grille

Grille Finished Dimensions (H x W):

276 mm x 212 mm

Cutout Dimensions (H x W): 249 mm x 190 mm

C-2 Installation Mechanism

Compatible with Wall Material Thickness

Range: 13 - 25 mm

Preconstruction Bracket and Fire-Rated

Back-Box Accessories Available

	Retail Ex VAT	Retail Inc VAT
<p>W263 (each)</p> <p>6.5" Aluminium Cone, Cast-Polymer Frame Woofer 1" Aluminium-Dome Swiveling Tweeter with Waveguide Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 100W Mounting Depth: 89 mm Weight: 1.5 kg / Shipping Weight: 2.2 kg</p>	£ 145.83	£ 175.00
		
<p>W363 (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Polymer Frame Woofer 1" Aluminium-Dome Swiveling Tweeter with Waveguide Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 120W Mounting Depth: 89 mm Weight: 1.7 kg / Shipping Weight: 2.2 kg</p>	£ 229.17	£ 275.00
		

Architectural Series RETAIL Price List - Valid From May 2020

6.5" In-Wall Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>W563 (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame Woofer 1" Aluminium-Dome Swiveling Tweeter with Waveguide 3-Position HF Level Control Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 130W Mounting Depth: 94 mm Weight: 2 kg / Shipping Weight: 2.5 kg</p>	£ 320.83	£ 385.00
<p>W763 (each)</p> <p>6.5" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control LF Boundary Gain Compensation Sensitivity: 89dB @ 2.83V Recommended Amplifier Power Range: 10 - 140W Mounting Depth: 94 mm Weight: 2.5 kg / Shipping Weight: 3.0 kg</p>	£ 458.33	£ 550.00



Architectural Series RETAIL Price List - Valid From May 2020

7" In-Wall Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>W873 (each)</p> <p>7" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control Boundary Gain Compensation Sensitivity: 86dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 150W Mounting Depth: 95 mm Weight: 4.1 kg / Shipping Weight: 4.1 kg Grille Finished Dimensions (H x W mm): 332 x 285 Cutout Dimensions (H x W mm): 306 x 249 C-2 Installation Mechanism Compatible with Wall Material Thickness Range: 13 - 25 mm Preconstruction Bracket and Fire-Rated Back-Box Accessories Available</p>	£ 733.33	£ 880.00
<p>W973 (each)</p> <p>7" Aluminium Cone, Cast-aluminium Frame High-output Woofer 1" Aluminium Dome High-output Tweeter with Waveguide HF Level & Tilt Controls LF Boundary Compensation & Listener Axis Controls Advanced High-order Crossover Network Cast Aluminium Baffle with Multi-point Spring Loaded Clamping Mechanism Mounting Depth: 94 mm Weight: 5.7 kg Shipping Weight: 6.6 kg Cutout Dimensions (H x W mm): 378 x 267 Includes Zero-bezel Magnetic Grille Grille Finished Dimensions (H x W mm): 414 x 307 Rough-in Bracket (RIB) accessory available (PCK7) Fire-rated Back-box (FBB) accessory available (FBB7)</p>	£ 1,237.50	£ 1,485.00



Architectural Series RETAIL Price List - Valid From May 2020

8" In-Wall Loudspeakers

Grille Finished Dimensions (H x W): 330 mm x 254 mm
 Cutout Dimensions (H x W): 303 mm x 227 mm
 C-2 Installation Mechanism
 Compatible with Wall Material Thickness Range: 13 - 51 mm
 Preconstruction Bracket and Fire-Rated Back-Box
 Accessories Available



	Retail Ex VAT	Retail Inc VAT
<p>W283 (each) 8" Aluminium Cone Cast-Polymer Frame Woofer 1" Aluminium-Dome Tweeter with Waveguide Sensitivity: 88dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 100W Mounting Depth: 94 mm Weight: 2 kg / Shipping Weight: 3 kg</p>	<p>£ 183.33</p>	<p>£ 220.00</p>
		
<p>W383 (each) 8" Micro-Ceramic Composite (MCC) Cone, Cast-Polymer Frame Woofer 1" Aluminium-Dome Tweeter with Waveguide Sensitivity: 89dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 125W Mounting Depth: 94 mm Weight: 2.2 kg / Shipping Weight: 2.9 kg</p>	<p>£ 320.83</p>	<p>£ 385.00</p>
		

Architectural Series RETAIL Price List - Valid From May 2020

8" In-Wall Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>W583 (each)</p> <p>8" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Tweeter with Waveguide 3-Position HF Level Control Sensitivity: 89dB @ 2.83V Recommended Amplifier Power Range: 10 - 135W Mounting Depth: 96 mm Weight: 2.9 kg / Shipping Weight: 3.5 kg</p>	£ 412.50	£ 495.00
		
<p>W783 (each)</p> <p>8" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control LF Boundary Gain Compensation Sensitivity: 89dB @ 2.83V Recommended Amplifier Power Range: 10 - 150W Mounting Depth: 95 mm Weight: 3.2 kg / Shipping Weight: 3.9 kg</p>	£ 550.00	£ 660.00
		

Architectural Series RETAIL Price List - Valid From May 2020

9" In-Wall Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>W893 (each)</p> <p>9" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame, High-Output Woofer 3.5" Micro-Ceramic Composite (MCC) Cone Midrange 1" Aluminium-Dome Low-Distortion, High-Output Tweeter with Waveguide 3-Position HF Level Control Boundary Gain Compensation Sensitivity: 89dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 200W Mounting Depth: 95 mm Weight: 4.9 kg / Shipping Weight: 5.8 kg Grille Finished Dimensions (H x W mm): 472 x 324 Cutout Dimensions (H x W mm): 443 x 295 C-2 Installation Mechanism Compatible with Wall Material Thickness Range: 13 - 25mm Preconstruction Bracket and Fire-Rated Back-Box Accessories Available</p>	<p>£ 875.00</p>	<p>£ 1,050.00</p>
<p>W990 (each)</p> <p>9" Aluminium Cone, Cast-aluminium Frame High-output Woofer 1" Aluminium Dome High-output Tweeter with Waveguide HF Level & Tilt Controls LF Boundary Compensation & Listener Axis Controls Advanced High-order Crossover Network Cast Aluminium Baffle with Multi-point Spring Loaded Clamping Mechanism Mounting Depth: 94 mm Weight: 7.7 kg / Shipping Weight: 8.8 kg Cutout Dimensions (H x W mm): 486 x 318 Includes Zero-bezel Magnetic Grille Grille Finished Dimensions (H x W mm): 523 x 353 Rough-in Bracket (RIB) accessory available (PCK9) Fire-rated Back-box (FBB) accessory available (FBB9)</p>	<p>£ 1,500.00</p>	<p>£ 1,800.00</p>



Architectural Series RETAIL Price List - Valid From May 2020

LCR In-Wall Loudspeakers

	Retail Ex VAT	Retail Inc VAT
<p>W253L (each)</p> <p>2 x 5.25" Aluminum Cone, Cast-Polymer Frame Woofers 1" Aluminum-Dome Swivelling Tweeter with Waveguide Sensitivity: 91dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 100W RMS Mounting Depth: 88 mm Weight: 2.5 kg / Shipping Weight: 3.3 kg Grille Finished Dimensions (H x W mm): 188 x 78 Cutout Dimensions (H x W mm): 359 x 163 C-2 Installation Mechanism Compatible with Wall Material Thickness Range: 13 - 25 mm</p>	£ 275.00	£ 330.00
		
<p>W553L (each)</p> <p>LCR Suitable for Vertical or Horizontal Orientation 2 x 5.25" Micro-Ceramic Composite (MCC) Cone, Cast-Aluminium Frame Woofers 1" Aluminium-Dome Tweeters with Waveguide Sensitivity: 90.5dB @ 2.83V, 1 m Recommended Amplifier Power Range: 10 - 150W Mounting Depth: 163 mm Weight: 3.0 kg / Shipping Weight: 3.5 kg Grille Finished Dimensions (H x W mm): 188 x 78 Cutout Dimensions (H x W mm): 359 x 163 C-2 Installation Mechanism Compatible with Wall Material Thickness Range: 13 - 25 mm</p>	£ 412.50	£ 495.00
		

Architectural Series RETAIL Price List - Valid From May 2020

Fire-Rated Metal Back Boxes (while stocks last)

All FBB models require minimum of 15mm drywall. Meets One Hour Fire Rating requirements per the ASTM E119, NFPA 251, UL 263, UL 2043, ULC CAN/ULCS101 and UBC 7-1 Standards.

	Retail Ex VAT	Retail Inc VAT
FBB4C FBB for C540 In-ceiling loudspeaker	£ 116.67	£ 140.00
FBB55 FBB for W522L In-wall loudspeaker	£ 158.33	£ 190.00
FBB6 FBB for all 6.5" In-wall loudspeakers	£ 112.50	£ 135.00
FBB7 FBB for all 7" In-wall loudspeakers	£ 141.67	£ 170.00
FBB8 FBB for all 8" In-wall loudspeakers	£ 112.50	£ 135.00
FBB9 FBB for all 9" In-wall loudspeakers	£ 141.67	£ 170.00

B28W / SA1000 High-performance In-wall Subwoofer / Amp System

Connect up to two B28W Subwoofers with each SA1000 Amplifier

Designed to fit standard 2 x 4 stud frame construction

Self-contained subwoofer module with integrated back-box allows for easy retrofit installations

B28W:

Dual 8" Polymer-coated Aluminium Cone Rubber-Surround woofers

Mounting Cutout Size (H x W mm): 597 x 368

Front-firing drivers with sealed back box for superior acoustic tuning

Zero-bezel, magnetically-attached grille

Dimensions (H x W x D mm): 645 x 419 x 102

SA1000:

Rated Output Power (RMS) into the minimum impedance of 4Ω: 700W (350W per Subwoofer)

User-adjustable Single-band PEQ – Room Equalization

Short-circuit and over-current protection

Over-temperature compensation

Dimensions (H x W x D mm): 89 x 432 x 280

Weight: 6.35 kg



B28W High Performance In Wall Sub

£ 958.33

£ 1,150.00

SA 1000 2 x 350W Amplifier

£ 1,125.00

£ 1,350.00