















**Retail Price List - Valid From September 2023**
**Dominus/Ultra certified in-ceiling speakers**
**RETAIL**  
ex VAT
**RETAIL**  
inc VAT
**S3ic In-Ceiling**

A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, and extremely versatile as LCR, surround, height or wide channel speaker, the S3ic is optimised for in-ceiling applications where a 30 degree reference axis within a larger listening window is desired.

Perlisten S3ic specifications

Enclosure Alignment: 3-way acoustic suspension

Driver complement: DPC Array: 28mm Beryllium tweeter; 28mm Textreme TPCD mid woofers;

165mm Alum frame, Textreme TPCD

Sensitivity: 89.7dB / 2.83v / 1.0m

Impedance: 4  $\Omega$  nominal / 3.2  $\Omega$  min

Listening Window (from 30deg Ref): Horizontal: +/-55 deg; Vertical: +/-30 deg

Response Linearity: 100 - 20kHz +/-1.5dB window

Frequency Response: 57 - 30kHz (-6dB); 43 - 33kHz (-10dB)

Typical In Room bass extension: 48Hz (-6dB); 31Hz (-10dB)

Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth

Recommended cutout: 305mm diameter

Weight: 9.4kg

Recommended Amplifier Power: 50 - 250W (with 80Hz HPF); 50 - 150W (full range)

SPL capability @1m (100-20kHz): 113.7dB peak; 111.0dB peak <3% 2nd, 3rd Harmonics

Certification: THX Dominus, THX Ultra




**s3i in ceiling**
**£2,833.33**
**£3,400.00**








**Retail Price List - Valid From September 2023**

Reference Series speakers	RETAIL ex VAT	RETAIL inc VAT
<p><b>MODEL R4b BOOKSHELF</b></p> <p><b>Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.</b></p> <p>Enclosure Alignment: 3-way acoustic suspension            Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm HPF diaphragm            Sensitivity: 84.6dB/2.83V/1.0m            Impedance: 4Ω nominal / 3.8Ω min            Response Linearity: 80 - 20kHz +/-1.5dB            Frequency Response (-10dB): 45 - 32kHz            Typical In Room bass extension: 38Hz            Dimensions (HxWxD): 382 x 230 x 336mm            Weight: 9.5 kg            Recommended Amplifier Power: 50 - 200W RMS            SPL capability @1m (100-20kHz): 107.6dB peak &lt;3% - 2nd, 3rd Harmonics            Certification: THX Ultra</p>		
<p><b>R4b High Gloss Black or White</b></p>		
<p><b>MODEL R4s SURROUND/HEIGHT</b></p> <p><b>Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.</b></p> <p>Enclosure Alignment: 3-way acoustic suspension            Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm HPF diaphragm            Sensitivity: 86.5dB/2.83V/1.0m            Impedance: 4Ω nominal / 3.7Ω min            Response Linearity: 300 - 20kHz +/-1.5dB            Frequency Response (-10dB): 48 - 32kHz            Typical In Room bass extension: 42Hz            Dimensions (HxWxD): 378 x 230 x 173mm            Weight: 9.5 kg            Recommended Amplifier Power: 50 - 200W RMS            SPL capability @1m (100-20kHz): 109.5dB peak &lt;3% - 2nd, 3rd Harmonics            Certification: THX Ultra</p>		
<p><b>R4s High Gloss Black or White</b></p>		

**Retail Price List - Valid From September 2023**
**Dominus/Ultra certified in-wall speaker**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**Perlisten R5i-LR**
**The R5m design adapted for THX Dominus Certified in-wall applications.**

Enclosure Alignment: 3-way acoustic suspension

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF

Sensitivity: 89.2dB / 2.83V / 1.0m

Impedance: 4Ω nominal / 3.4Ω min

Response Linearity: 80 - 20kHz +/-1.5dB window

Frequency Response (-10dB): acoustic suspension 39 - 32kHz

Typical In Room bass extension: acoustic suspension 34Hz

Dimensions (HxWxD): 665 x 298 x 111mm

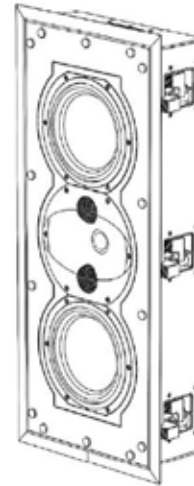
Mounting Dimensions (HxWxD): 624 x 257 x 101.7mm

Weight: 15.9 kg

Recommended Amplifier Power: 50 - 250W RMS

SPL capability @1m (100-20kHz): 113.2dB peak; 111.0dB peak &lt;3% 2nd, 3rd Harmonics

Certification: THX Dominus, THX Ultra


**R5i-LR**
**£2,250.00**
**£2,700.00**
**Perlisten R5i-C**
**The R5c design adapted for THX Dominus Certified in-wall applications.**

Enclosure Alignment: 3-way acoustic suspension

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF

Sensitivity: 89.4dB / 2.83V / 1.0m

Impedance: 4Ω nominal / 3.4Ω min

Response Linearity: 80 - 20kHz +/-1.5dB window

Frequency Response (-10dB): acoustic suspension 40 - 32kHz

Typical In Room bass extension: acoustic suspension 34Hz

Dimensions (HxWxD): 298 x 665 x 111mm

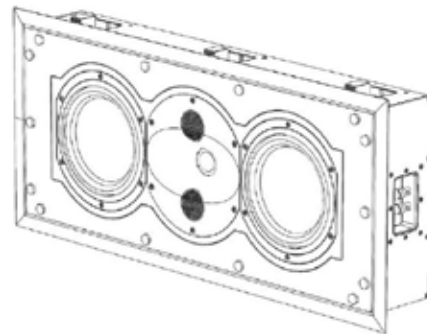
Mounting Dimensions (HxWxD): 257 x 624 x 101.7mm

Weight: 15.9 kg

Recommended Amplifier Power: 50 - 250W RMS

SPL capability @1m (100-20kHz): 113.4dB peak; 111.0dB peak &lt;3% 2nd, 3rd Harmonics

Certification: THX Dominus, THX Ultra


**R5i-C**
**£2,250.00**
**£2,700.00**

**Retail Price List - Valid From September 2023**

**Dominus/Ultra certified in-wall speaker**

RETAIL  
ex VAT

RETAIL  
inc VAT

**Perlisten R4i-LCRS**

The R4s/R4b designs adapted for THX Dominus Certified in-wall surround channel applications.

Enclosure Alignment: 3-way acoustic suspension

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (1) HPF

Sensitivity: 88.8dB / 2.83V / 1.0m

Impedance: 4Ω nominal / 3.4Ω min

Response Linearity: 100 - 20kHz +/-1.5dB window

Frequency Response (-10dB): 46 - 37kHz

Typical In Room bass extension: 40Hz

Dimensions (HxWxD): 479 x 298 x 111mm

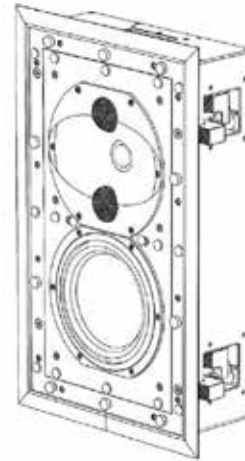
Mounting Dimensions (HxWxD): 438 x 257 x 101.7mm

Weight: 11.2 kg

Recommended Amplifier Power: 50 – 200W RMS

SPL capability @1m (100-20kHz): 111.8dB peak; 111.0dB peak <3% 2nd, 3rd Harmonics

Certification: THX Dominus Surround, THX Ultra LCR



R4i-LCRS

£1,666.67

£2,000.00

**On-Wall Adaptor Frames for In-Wall speakers**

RETAIL  
ex VAT

RETAIL  
inc VAT

7i OWF MW on wall frame Matt White for 7 series

£416.67

£500.00

5i OWF MW on wall frame Matt White for 5 series

£333.33

£400.00

4i OWF MW on wall frame Matt White for 4 series

£250.00

£300.00



**Retail Price List - Valid From September 2023**
**Dominus/Ultra certified in-ceiling speakers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**R3ic In-Ceiling**

A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications and extremely versatile as LCR, surround, height or wide channel speaker.

Enclosure Alignment: 3-way acoustic suspension

Driver complement: DPC Array: 28mm silk dome tweeter; 28mm silk dome mid woofers; 165mm Alum frame, HFP pulp

Sensitivity: 88.8dB / 2.83v / 1.0m; Impedance: 4 Ω nominal / 3.2 Ω min

Listening Window (from 30deg Ref): Horizontal: +/-55 deg;

Vertical: +/-30 deg

Frequency Response: 59 - 30kHz (-6dB); 46 - 33kHz (-10dB)

Typical In Room bass extension: 51Hz (-6dB); 36Hz (-10dB)

Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth; Recommended cutout: 305mm diameter

Weight: 9.4kg

Certification: THX Dominus, THX Ultra


**R3ic in ceiling**
**£1,416.67**
**£1,700.00**
**R2ic In-Ceiling**

A great solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, the THX Ultra certified R2ic is a simplified 2-way version of the R3ic.

Enclosure Alignment: 2-way infinite baffle, optional rear enclosure

Driver complement: DPC Array: 28mm Silk Dome; Woofers: 165mm (1) HPF

Sensitivity: 86.0dB / 2.83V / 1.0m; Impedance: 6Ω nominal / 3.4Ω min

Listening Window (from 30deg Ref): Horizontal: +/-55 deg; Vertical: +/-30 deg

Frequency Response (-10dB): 31 - 32kHz

Typical In Room bass extension (-10dB): 22Hz

Dimensions (with grille mm): 343.3 dia x 153.1 depth; Recommended cutout mm: 305 dia

Weight: 5.4kg

Certification: THX Ultra


**R2ic in ceiling**
**£916.67**
**£1,100.00**

**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D215s SUBWOOFER**

**Push-pull driver configuration. Carbon fibre composite diaphragms. Aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. All D-Series subs feature a 2.4" LCD touchscreen display and the ability to control advance settings using Perlisten's App. THX Dominus certified.**

Alignment: Push-Pull, acoustic suspension

Amplifier: 3.0kW RMS short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver complement: (2) 380mm Carbon fibre diaphragm, +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-200Hz (-6dB) / 16-210Hz (-10dB); Boost (Large Room) EQ 15-200Hz (-6dB) / 13-210Hz (-10dB); Cut (Small Room) EQ 24-200Hz (-6dB) / 18-210Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: variable 0-270°

Polarity: normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 805 x 500 x 650.5mm

Weight: 92.0 kg

Certification: THX Dominus


**D215s (piano black)**
**£7,500.00**
**£9,000.00**

**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D212s SUBWOOFER**

Push-pull driver configuration. Carbon fibre composite diaphragms. Aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. All D-Series subs feature a 2.4" LCD touchscreen display and the ability to control advance settings using Perlisten's App. THX Dominus certified.

Alignment: Push-Pull, acoustic suspension

Amplifier: 3.0kW RMS short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver compliment: (2) 300mm, Carbon fibre diaphragm +/-30mm linear excursion

Frequency Response: THX EQ 20-231Hz (-6dB) / 16-245Hz (-10dB); Boost (Large Room) EQ 15-231Hz (-6dB) / 13.5-245Hz (-10dB); Cut (Small Room) EQ 24-231Hz (-6dB) / 18-245Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 668 x 420 x 550mm

Weight: 68.0 kg

Certification: THX Dominus


**D212s (piano black)**
**£5,833.33**
**£7,000.00**



**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D15s SUBWOOFER**

The D15s is the smallest single THX Dominus certified sub available. Proprietary 2.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. Carbon fibre composite diaphragms, multiple aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. 2.4" LCD touchscreen display and Perlisten App control.

Alignment: Acoustic suspension

Amplifier: 2.0kW RMS short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver compliment: 380mm, Carbon fibre diaphragm +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-320Hz (-6dB) / 16-395Hz (-10dB);

Boost (Large Room) EQ 16-320Hz (-6dB) / 14-395Hz (-10dB); Cut (Small Room) EQ 24-320Hz (-6dB) / 18-395Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 528 x 500 x 500mm

Weight: 46.0 kg

Certification: THX Dominus


**D15s (piano black)**
**£4,166.67**
**£5,000.00**

**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D12s SUBWOOFER**

The smallest subwoofer in the series yet packs enough punch to be certified THX Dominus using a pair of D12s subs. Proprietary 1.5kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. Carbon fibre composite diaphragms, multiple aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. 2.4" LCD touchscreen display and Perlisten App control.



Alignment: Acoustic suspension

Amplifier: 1.5kW rms short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver complement: 300mm, Carbon fibre diaphragm +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-289Hz (-6dB) / 16-330Hz (-10dB);

Boost (Large Room) EQ 16-289Hz (-6dB) / 14-330Hz (-10dB); Cut (Small Room) EQ 25-289Hz (-6dB) / 19-330Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 448 x 420 x 450mm Weight: 41.0 kg

Certification: THX Dominus (in pairs)

**D12s (piano black)**
**£3,333.33**
**£4,000.00**

**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R212s SUBWOOFER**

The R212s is a 2x12" push-pull active subwoofer, powered by a proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor. Control is via 2.4" LCD touchscreen display and smartphone app. Certified THX Dominus when two R212s subs are used.

Alignment: Push-Pull, acoustic suspension

Amplifier: 1.3kW rms short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver complement: (2)300mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB); Boost (Large Room) EQ 16-256Hz (-6dB) / 14-278Hz (-10dB); Cut (Small Room) EQ 25-256Hz (-6dB) / 19-278Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°

Polarity: Normal / inverted

Configurable Auto turn-on and 12v Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 600 x 410 x 500mm

Weight: 48.2 kg

Certification: THX Dominus (2), THX Ultra (1)

Available finishes: Piano black


**R212s**
**£4,583.33**
**£5,500.00**

**Retail Price List - Valid From September 2023**
**D-Series Subwoofers**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R210s SUBWOOFER**

**The R210s is a 2x10" push-pull active subwoofer, powered by a proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor. Control is via 2.4" LCD touchscreen display and smartphone app. Certified THX Dominus when four R210s subs are used.**

Alignment: Push-Pull, acoustic suspension

Amplifier: 1.3kW rms short term

Display Interface: 2.4" LCD colour touchscreen

App: iOS and Android

Processor: 32-bit ARM Cortex M4, double precision floating point math

DSP Engine: Ti DSP 48-bit data paths

Driver complement: (2)250mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB); Boost (Large Room) EQ 16-256Hz (-6dB) / 14-302Hz (-10dB); Cut (Small Room) EQ 25-290Hz (-6dB) / 19-302Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°

Polarity: Normal / inverted

Configurable Auto turn-on and 12v Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2

Dimensions (HxWxD): 545 x 380 x 450mm

Weight: 44.0 kg

Certification: THX Dominus (4), THX Ultra (1)

Available finishes: Piano black


**R210s**
**£3,666.67**
**£4,400.00**

**Retail Price List - Valid From September 2023**

Accessories		RETAIL ex VAT	RETAIL inc VAT
SSLR-HGB	S Series stand L/R pair	£1,250.00	£1,500.00
SSC-HGB	S Series Centre stand	£625.00	£750.00
RSLR-HGB	R Series Stand L/R pair	£1,125.00	£1,350.00
RSC-HGB	R Series Centre stand	£541.67	£650.00
R/S-BRCKT	S/R Series wall bracket up to 25kg	£62.50	£75.00
Grille R-Ser	R Series round grille	£45.83	£55.00
Grille D215s		£158.33	£190.00
Grille D212s		£141.67	£170.00
Grille D15s		£100.00	£120.00
Grille D12s		£95.83	£115.00
Grille R212s		£133.33	£160.00
Grille R210s		£125.00	£150.00

Note: Brackets, Bulk pack with 20 pcs. Note: Grille R-Series, bulk pack with 18 pcs.  
 Note: Grille D and R Series subwoofers, bulk pack with 5 pcs.