

Retail Price List - Valid From June 2025

Focussing R&D, marketing and manufacturing at sites across the US, in Denmark and China with over a century of industry experience and leadership, Perlisten Audio offers music and home cinema enthusiasts a completely proprietary path to greater fidelity and value. Perlisten Audio is the first brand in the world to have received THX Dominus Certification, the newest and the largest performance class of THX Certification, designed to bridge the gap between large home theatre speakers and those used in movie houses worldwide.

Signature Series speakers (priced as singles)
RETAIL
ex VAT

RETAIL
inc VAT

MODEL S7t TOWER

Featuring proprietary DPC-Array of 28mm Beryllium dome and dual 28mm TPCD ultra-lightweight domes. All transducers are developed ground up by our engineers. Custom bass drivers made from thin-ply carbon diaphragms (TPCD) can be configured as bass reflex or acoustic suspension and adjusted for listener preference. **World's first loudspeakers to be certified for THX Dominus.**

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD

Sensitivity: 92dB/2.83V/1.0m

Frequency Response (+/-2dB): 80-20kHz

Dimensions (HxWxD): 1295x240x400mm

Weight: 55.7 kg

Recommended Amplifier Power: 100-600W RMS

Certification: THX Dominus - large LCR


S7t High Gloss Ebony
£8,750.00
£10,500.00
S7t High Gloss Black
£7,500.00
£9,000.00
MODEL S7c CENTRE

FSimilar driver complement to the flagship S7T. THX Dominus certified.

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD

Sensitivity: 92dB/2.83V/1.0m

Frequency Response (+/-2dB): 80-20kHz

Dimensions (HxWxD): 960x240x400mm

Weight: 33.5 kg

Certification: THX Dominus - LCR


High Gloss Ebony
£7,000.00
£8,400.00
High Gloss Black
£6,250.00
£7,500.00

Retail Price List - Valid From June 2025
Signature Series speakers (priced as singles)
MODEL S5t TOWER

A smaller version of the S7t with nearly the same SPL, sensitivity, and low frequency output.

Driver complement: Flagship DPC-Array: 28mm (1) Beryllium; 28mm (2) Textreme TPCD; Woofers: 180mm(2) Textreme TPCD

Sensitivity: 89.5dB / 2.83v / 1.0m

Frequency Response (-10dB): Bass reflex: 24 - 32kHz; Acoustic suspension: 36 - 32kHz

Dimensions (HxWxD): 1119 x 240 x 400mm

Weight 43.2 kg

Certification: THX Dominus, THX Ultra


High Gloss Ebony
£6,833.33
£8,200.00
High Gloss Black
£5,916.67
£7,100.00
MODEL S5c CENTRE

A world class centre for slightly smaller rooms and screens, similar to the S7c with nearly the same SPL, sensitivity, and low frequency output.

Driver complement: Flagship DPC Array: 28mm (1) Beryllium; 28mm (2) Textreme TPCD

Sensitivity: 88.8dB / 2.83v / 1.0m

Frequency Response (-10dB): 42 - 34kHz

Dimensions (HxWxD): 4240 x 596 x 300mm

Weight: 21.4 kg

Certification: THX Dominus, THX Ultra


High Gloss Ebony
£5,375.00
£6,450.00
High Gloss Black
£4,583.33
£5,500.00
MODEL S5m MONITOR

Features Perlisten DPC array and two 180mm Textreme TPCD woofers. THX Dominus certified.

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (2) Textreme TPCD

Sensitivity: 89.6dB/2.83V/1.0m

Frequency Response (+/-1.5dB): 80-20kHz

Dimensions (HxWxD) without stand: 600x240x400mm

Weight: 19.0 kg

Certification: THX Dominus; THX Ultra


High Gloss Ebony
£5,750.00
£6,900.00
High Gloss Black
£4,916.67
£5,900.00

Retail Price List - Valid From June 2025

Signature Series speakers (priced as singles)			RETAIL ex VAT	RETAIL inc VAT
-----------------------------------------------	--	--	------------------	-------------------

MODEL S4b BOOKSHELF

For use in 2.1 systems or as surround, height or LCR in a cinema system using subwoofers. Bookshelf, stand or on-wall mounting with keyhole or available bracket. Features DPC-Array and single 180mm Textreme TPCD woofer. THX Dominus certified.

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (1) Textreme TPCD

Sensitivity: 85.4dB / 2.83V / 1.0m

Frequency Response (+/-1.5dB): 100 - 20kHz

Dimensions (HxWxD) without stand: 420 x 240 x 185mm

Weight: 11.0 kg

Certification: THX Dominus



High Gloss Ebony			£3,583.33	£4,300.00
High Gloss Black			£2,916.67	£3,500.00

MODEL S4s SURROUND

Designed for on-wall or flushed-in (2pi) applications as surround, height or LCR. High sensitivity, power handling and low distortion make S4s the ideal choice as a surround speaker for high-end cinemas. Features DPC-Array and single single 180mm Textreme TPCD woofer. THX Dominus certified.

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (1) Textreme TPCD

Sensitivity: 89.6dB/2.83V/1.0m

Frequency Response (+/-1.5dB): 100 - 20kHz

Dimensions (HxWxD) without stand: 405x240x185mm



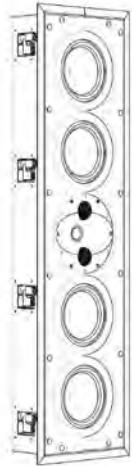


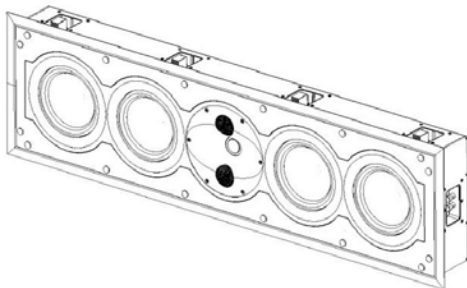


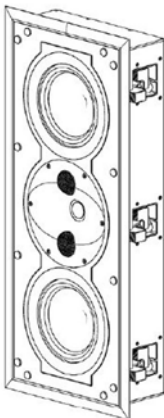
Weight: 9.5 kg

Certification: THX Dominus; THX Ultra



High Gloss Ebony			£3,500.00	£4,200.00
High Gloss Black			£2,916.67	£3,500.00

Retail Price List - Valid From June 2025

Dominus certified in-wall speaker (single)			RETAIL ex VAT	RETAIL inc VAT
Perlisten S7i-LR The award-winning flagship S7t design adapted for THX Dominus Certified in-wall applications. Driver complement: DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD Sensitivity: 91.9dB / 2.83V / 1.0m Frequency Response (-10dB): 45 - 37kHz Dimensions (HxWxD): 1036.6 x 298.6 x 111.2mm Mounting Dimensions (HxWxD): 996 x 257 x 101.7mm Weight: 26.4 kg Certification: THX Dominus			 	
				
S7i-LR			£6,208.33	£7,450.00
Perlisten S7i-C The award-winning flagship S7t design adapted for THX Dominus Certified in-wall centre-channel applications. Driver complement: DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD Sensitivity: 92.0dB / 2.83V / 1.0m Frequency Response (-10dB): 45 - 37kHz Dimensions (HxWxD): 298.6 x 1036.6 x 111.2mm Mounting Dimensions (HxWxD): 257 x 996 x 101.7mm Weight: 26.4 kg Certification: THX Dominus			 	
				
S7i-C			£6,208.33	£7,450.00
Perlisten S5i-LR The award-winning S5m design adapted for THX Dominus Certified in-wall applications. Driver complement: DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (2) Textreme TPCD Sensitivity: 91.9dB / 2.83V / 1.0m Frequency Response (-10dB): 52 - 37kHz Dimensions (HxWxD): 624 x 257 x 101.7mm Mounting Dimensions (HxWxD): 624 x 257 x 101.7mm Weight: 15.9 kg Certification: THX Dominus			 	
				
S5i-LR			£5,250.00	£6,300.00

Retail Price List - Valid From June 2025
Dominus certified in-wall speaker (single)
Perlisten S5i-C

The award-winning S5m design adapted for THX Dominus Certified in-wall centre channel applications.

Driver complement: DPC Array: 28mm Beryllium, 28mm (2)

Textreme TPCD; Woofers: 180mm (2) Textreme TPCD

Sensitivity: 91.6dB / 2.83V / 1.0m

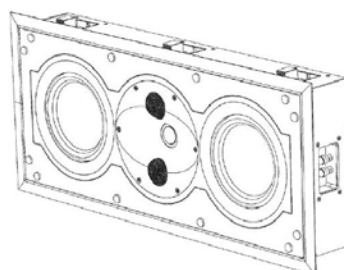
Frequency Response (-10dB): 50 - 37kHz

Dimensions (HxWxD): 298 x 665 x 111mm

Mounting Dimensions (HxWxD): 257 x 624 x 101.7mm

Weight: 15.9 kg

Certification: THX Dominus


S5i-C
£5,250.00
£6,300.00
Perlisten S4i-LCRS

The award-winning S4s/S4b designs adapted for THX Dominus Certified in-wall surround channel applications.

Driver complement: DPC Array: 28mm Beryllium, 28mm (2)

Textreme TPCD; Woofers: 180mm (1) Textreme TPCD

Sensitivity: 88.0dB / 2.83V / 1.0m

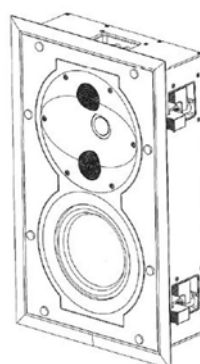
Frequency Response (-10dB): 42 - 37kHz

Dimensions (HxWxD): 479 x 298 x 111mm

Mounting Dimensions (HxWxD): 438 x 257 x 101.7mm

Weight: 11.2 kg

Certification: THX Dominus Surround, Ultra LCR


S4i-LCRS
£3,125.00
£3,750.00
On-Wall Adaptor Frames for In-Wall speakers
**RETAIL
ex VAT**
**RETAIL
inc VAT**
7i OWF MW on wall frame Matt White for 7 series

£416.67
£500.00
5i OWF MW on wall frame Matt White for 5 series

£333.33
£400.00
4i OWF MW on wall frame Matt White for 4 series

£250.00
£300.00


Retail Price List - Valid From June 2025

Dominus/Ultra certified in-ceiling speakers (single)

RETAIL
ex VAT

RETAIL
inc VAT

S3ic In-Ceiling

A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, and extremely versatile as LCR, surround, height or wide channel speaker, the S3ic is optimised for in-ceiling applications where a 30 degree reference axis within a larger listening window is desired.

Driver complement: DPC Array: 28mm Beryllium tweeter; 28mm Textreme TPCD mid; Woofer: 165mm Alum frame, Textreme TPCD
Sensitivity: 89.7dB / 2.83v / 1.0m
Frequency Response: 57 - 30kHz (-6dB); 43 - 33kHz (-10dB)
Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth
Recommended cutout: 305mm diameter Weight: 9.4kg
Certification: THX Dominus, THX Ultra



S3ic in-ceiling

£2,833.33

£3,400.00

Retail Price List - Valid From June 2025

Reference Series speakers (priced as singles)			RETAIL ex VAT	RETAIL inc VAT
MODEL R7t TOWER <p>Two-channel high fidelity speaker with the versatility to be used in multi-channel systems. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers, which can be aligned as bass reflex or acoustic suspension depending on specific tastes. THX Dominus certified.</p> <p>Driver complement: DPC-Array: 26mm(3) Silk dome, woofers: 165mm (4) HPF diaphragms Sensitivity: 90.0dB/2.83V/1.0m Frequency Response (-10dB): Bass reflex: 27 - 32kHz; Acoustic suspension: 38 - 32kHz Dimensions (HxWxD): 1268 x 230 x 350mm Weight: 48.0 kg Certification: THX Dominus; THX Ultra</p>				
R7t High Gloss Black			£3,666.67	£4,400.00
MODEL R5t TOWER <p>Two-channel high fidelity speaker with the versatility to be used in multi-channel systems. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers, which can be aligned as bass reflex or acoustic suspension depending on specific tastes. THX Dominus certified.</p> <p>Driver complement: DPC Array: 26mm(3) Silk dome, woofers: 165mm (2) HPF diaphragms Sensitivity: 89dB/2.83V/1.0m Frequency Response (+/-2dB): 80 - 20kHz Dimensions (HxWxD): 1100x230x350mm Weight: 26.5 kg Certification: THX Dominus; THX Ultra</p>				
R5t High Gloss Black			£2,875.00	£3,450.00



Retail Price List - Valid From June 2025
Reference Series speakers (priced as singles)
RETAIL
ex VAT

RETAIL
inc VAT

Perlisten R7c CENTRE

Sharing “trickle-down” technology from Perlisten’s flagship S-Series, a centre channel for R-Series speakers, the R7t and R5t in particular.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 90.2 dB / 2.83V / 1.0m

Frequency Response (-10dB): 36 - 32kHz

Dimensions (HxWxD): 230 x 920 x 300mm

Weight: 36.8 kg

Finish: Piano High Gloss Black


R7c High Gloss Black
£3,166.67
£3,800.00
MODEL R5c CENTRE

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers. THX Dominus certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers:

165mm(2) HPF diaphragms

Sensitivity: 88.6dB/2.83V/1.0m

Frequency Response (-10dB): 49 - 32kHz

Dimensions (HxWxD): 240 x 550 x 270mm

Weight: 15.0 kg

Certification: THX Dominus, THX Ultra


R5c High Gloss Black
£2,000.00
£2,400.00
MODEL R5m MONITOR

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers. THX Dominus certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm

(2) HPF diaphragms

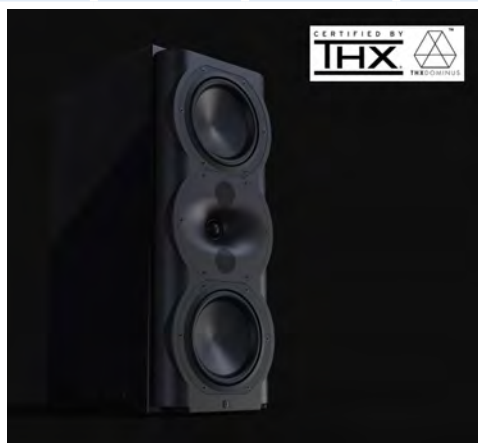
Sensitivity: 89.2dB/2.83V/1.0m

Frequency Response (-10dB): bass reflex: 40 - 32kHz; acoustic suspension: 47 - 32kHz

Dimensions (HxWxD): 546 x 230 x 336mm

Weight: 17.5 kg

Certification: THX Dominus, THX Ultra


R5m High Gloss Black
£2,000.00
£2,400.00

Retail Price List - Valid From June 2025

Reference Series speakers (priced as singles)			RETAIL ex VAT	RETAIL inc VAT
<p>MODEL R4b BOOKSHELF</p> <p>Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.</p> <p>Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm HPF diaphragm Sensitivity: 84.6dB/2.83V/1.0m Frequency Response (-10dB): 45 - 32kHz Dimensions (HxWxD): 382 x 230 x 336mm Weight: 9.5 kg Certification: THX Ultra</p>				
R4b High Gloss Black			£1,416.67	£1,700.00
<p>MODEL R4s SURROUND/HEIGHT</p> <p>Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.</p> <p>Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm HPF diaphragm Sensitivity: 86.5dB/2.83V/1.0m Frequency Response (-10dB): 48 - 32kHz Dimensions (HxWxD): 378 x 230 x 173mm Weight: 9.5 kg Certification: THX Ultra</p>				
R4s High Gloss Black			£1,250.00	£1,500.00



Retail Price List - Valid From June 2025
R Series IW speakers (single)
Perlisten R7i L/R

Based largely on the R7t, adapted for inwall applications. Shallow 4" mounting depth and integral aluminium extrusion rear enclosure ensure consistent performance and minimal sound propagation to adjacent rooms.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 89.9 dB / 2.83V / 1.0m

Frequency Response (-10dB): 42 - 32kHz

Dimensions (HxWxD): 1032.0 x 293.0 x 120.8mm Weight: 23.1 kg

Finish: matte black aluminium with white grille


R7i LR Matte Black
£2,916.67
£3,500.00
Perlisten R7i C CENTRE

Based largely on the R7t, adapted for inwall applications. Shallow 4" mounting depth and integral aluminium extrusion rear enclosure ensure consistent performance and minimal sound propagation to adjacent rooms.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 90.1 dB / 2.83V / 1.0m

Frequency Response (-10dB): 42 - 32kHz

Dimensions (HxWxD): 293.0 x 1032.0 x 120.8mm

Weight: 23.1 kg

Finish: matte black aluminium with white grille


R7i C Matte Black
£2,916.67
£3,500.00
Perlisten R5i-LR

The R5m design adapted for THX Dominus Certified in-wall applications.

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF

Sensitivity: 89.2dB / 2.83V / 1.0m

Frequency Response (-10dB): acoustic suspension 39 - 32kHz

Dimensions (HxWxD): 665 x 298 x 111mm

Mounting Dimensions (HxWxD): 624 x 257 x 101.7mm



Weight: 15.9 kg

Certification: THX Dominus, THX Ultra


R5i-LR Matte Black
£2,000.00
£2,400.00

Retail Price List - Valid From June 2025

R Series IW speakers (single)				RETAIL ex VAT	RETAIL inc VAT
Perlisten R5i-C CENTRE					
<p>The R5c design adapted for THX Dominus Certified in-wall applications.</p> <p>Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF</p> <p>Sensitivity: 89.4dB / 2.83V / 1.0m</p> <p>Frequency Response (-10dB): acoustic suspension 40 - 32kHz</p> <p>Dimensions (HxWxD): 298 x 665 x 111mm</p> <p>Mounting Dimensions (HxWxD): 257 x 624 x 101.7mm</p> <p>Weight: 15.9 kg</p> <p>Certification: THX Dominus, THX Ultra</p>					
R5i-C Matte Black				£2,000.00	£2,400.00
Perlisten R4i-LCRS					
<p>The R4s/R4b designs adapted for THX Dominus Certified in-wall surround channel applications.</p> <p>Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (1) HPF</p> <p>Sensitivity: 88.8dB / 2.83V / 1.0m</p> <p>Frequency Response (-10dB): 46 - 37kHz</p> <p>Dimensions (HxWxD): 479 x 298 x 111mm</p> <p>Mounting Dimensions (HxWxD): 438 x 257 x 101.7mm</p> <p>Weight: 11.2 kg</p> <p>Certification: THX Dominus Surround, THX Ultra LCR</p>					
R4i-LCRS Matte Black				£1,500.00	£1,800.00
On-Wall Adaptor Frames for In-Wall speakers				RETAIL ex VAT	RETAIL inc VAT
7i OWF MW	on wall frame Matt White for 7 series			£416.67	£500.00
5i OWF MW	on wall frame Matt White for 5 series			£333.33	£400.00
4i OWF MW	on wall frame Matt White for 4 series			£250.00	£300.00



Retail Price List - Valid From June 2025
Dominus/Ultra certified in-ceiling speakers (single)
RETAIL
ex VAT

RETAIL
inc VAT

R3ic In-Ceiling

A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications and extremely versatile as LCR, surround, height or wide channel speaker.

Driver complement: DPC Array: 28mm silk dome tweeter; 28mm silk dome mid woofers; 165mm Alum frame, HFP pulp

Sensitivity: 88.8dB / 2.83v / 1.0m

Frequency Response: 59 - 30kHz (-6dB); 46 - 33kHz (-10dB)

Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth;

Recommended cutout: 305mm diameter

Weight: 9.4kg

Certification: THX Dominus, THX Ultra


R3ic Matte Black
£1,500.00
£1,800.00
R2ic In-Ceiling

A great solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, the THX Ultra certified R2ic is a simplified 2-way version of the R3ic.

Driver complement: DPC Array: 28mm Silk Dome; Woofers: 165mm (1) HPF

Sensitivity: 86.0dB / 2.83V / 1.0m

Frequency Response (-10dB): 31 - 32kHz

Dimensions (with grille mm): 343.3 dia x 153.1 depth; Recommended cutout mm: 305 dia

Weight: 5.4kg

Certification: THX Ultra


R2ic Matte Black
£916.67
£1,100.00

Retail Price List - Valid From June 2025
D-Series Subwoofers
MODEL D215s SUBWOOFER

Push-pull driver configuration. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. 2.4" LCD touchscreen display. Ability to control advance settings using Perlisten's App. THX Dominus certified.

Drivers: (2) 380mm Carbon fibre diaphragm, +/-30mm linear excursion
 Reference sensitivity: 92dB / 150mV/ 1.0m
 Frequency Response: THX EQ 20-200Hz (-6dB) / 16-210Hz (-10dB); Boost (Large Room) EQ 15-200Hz (-6dB) / 13-210Hz (-10dB); Cut (Small Room) EQ 24-200Hz (-6dB) / 18-210Hz (-10dB)
 Inputs: (2) Balanced XLR; (2) Unbalanced RCA
 Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: variable 0-270°
 Polarity: normal / inverted
 Configurable Auto turn-on + 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2
 Dimensions (HxWxD): 805 x 500 x 650.5mm
 Weight: 92.0 kg


D215s High Gloss Black
£7,666.67
£9,200.00
D215s Matte Black
£7,083.33
£8,500.00
MODEL D212s SUBWOOFER

Push-pull driver configuration. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. 2.4" LCD touchscreen display. Ability to control advance settings using Perlisten's App. THX Dominus certified.

Drivers: (2) 300mm, Carbon fibre diaphragm +/-30mm linear excursion
 Reference sensitivity: 92dB / 150mV/ 1.0m
 Frequency Response: THX EQ 20-231Hz (-6dB) / 16-245Hz (-10dB); Boost (Large Room) EQ 15-231Hz (-6dB) / 13.5-245Hz (-10dB); Cut (Small Room) EQ 24-231Hz (-6dB) / 18-245Hz (-10dB)
 Inputs: (2) Balanced XLR; (2) Unbalanced RCA
 Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: variable 0-270°; Polarity: normal / inverted
 Configurable Auto turn-on + 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2
 Dimensions (HxWxD): 668 x 420 x 550mm
 Weight: 68.0 kg


D212s High Gloss Black
£5,833.33
£7,000.00

Retail Price List - Valid From June 2025
D-Series Subwoofers
RETAIL
ex VAT

RETAIL
inc VAT

MODEL D15s SUBWOOFER

Proprietary 2.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. 2.4" LCD touchscreen display and Perlisten App control. Certification: THX Dominus

Driver: 380mm, Carbon fibre diaphragm +/-30mm linear excursion
 Reference sensitivity: 92dB / 150mV/ 1.0m
 Frequency Response: THX EQ 20-320Hz (-6dB) / 16-395Hz (-10dB); Boost (Large Room) EQ 16-320Hz (-6dB) / 14-395Hz (-10dB); Cut (Small Room) EQ 24-320Hz (-6dB) / 18-395Hz (-10dB)
 Inputs: (2) Balanced XLR; (2) Unbalanced RCA
 Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: Variable 0-270°
 Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2
 Dimensions (HxWxD): 528 x 500 x 500mm
 Weight: 46.0 kg


D15s High Gloss Black
£4,583.33
£5,500.00
MODEL D12s SUBWOOFER

Proprietary 1.5kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. 2.4" LCD touchscreen display and Perlisten App control. Certification: THX Dominus (in pairs)

Driver: 300mm, Carbon fibre diaphragm +/-30mm linear excursion
 Reference sensitivity: 92dB / 150mV/ 1.0m
 Frequency Response: THX EQ 20-289Hz (-6dB) / 16-330Hz (-10dB); Boost (Large Room) EQ 16-289Hz (-6dB) / 14-330Hz (-10dB); Cut (Small Room) EQ 25-289Hz (-6dB) / 19-330Hz (-10dB)
 Inputs: (2) Balanced XLR; (2) Unbalanced RCA
 Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1, RCA 1+2
 Dimensions (HxWxD): 448 x 420 x 450mm
 Weight: 41.0 kg


D12s High Gloss Black
£3,500.00
£4,200.00

Retail Price List - Valid From June 2025
D-Series Subwoofers
Perlisten D3is IW/OW subwoofer/amp

Designed for applications where space is a premium. In-wall or on-wall. Proprietary isolation mounts and brackets reduce overall vibration and noise. Powered by Perlisten's 1500W amplifier now in its own chassis, utilizing a larger 2.8" LCD touchscreen display. Rack mounting hardware included. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor.

Drivers: (3)215mm (8.5"), Carbon fibre diaphragm

Reference sensitivity: 89.5 dB /150mV/ 1.0m

Frequency Response: THX EQ: 20-290Hz (-6dB)/16-350Hz (-10dB),

Boost (Large Room): 17-290Hz (-6dB)/15-350Hz (-10dB), EQ Cut (Small

Room): EQ 31-290Hz (-6dB)/23-350Hz (-10dB)

Inputs: (1) Balanced XLR, (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered,

(1) Digital AES/2

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR, RCA

Subwoofer Dimensions overall (HxWxD): 920.8 x 355.6 x 146.1mm

(without brackets)

Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm

Weight: subwoofer 39.7 kg, amplifier 6.1 kg


D3is Matt Black
£4,583.33
£5,500.00
Perlisten D8is In-Room/IW/OW subwoofer/amp

Push-Pull design utilising a unique array of (8)215mm drivers and a proprietary, versatile vibration isolation mounting solution. Driven by Perlisten's DSP3000A 3kW amplifier and custom DSP with front facing 2.8" colour touchscreen.

Drivers: (8)215mm (8.5"), Carbon fibre diaphragm

Reference sensitivity: 97.0 dB /150mV/ 1.0m

Frequency Response: THX EQ: 20-290Hz (-6dB)/16-330Hz (-10dB), Boost

(Large Room): 16-290Hz (-6dB)/14-330Hz (-10dB), EQ Cut (Small Room): EQ

25-290Hz (-6dB)/19-330Hz (-10dB)

Inputs: (1) Balanced XLR, (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1)

Digital AES/2

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase: Variable 0-270°; Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR, RCA

Subwoofer Dimensions overall (HxWxD): 1137.6 x 508.0 x 238.6mm

(without brackets)

Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm

Weight: subwoofer 103.8 kg, amplifier 6.1 kg


D8is Matt Black
£15,000.00
£18,000.00

Retail Price List - Valid From June 2025
R-Series Subwoofers
MODEL R212s SUBWOOFER

Push-pull active subwoofer. Proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4

Cortex processor. 2.4" LCD touchscreen display and smartphone app.

Drivers: (2)300mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB); Boost

(Large Room) EQ 16-256Hz (-6dB) / 14-278Hz (-10dB); Cut

(Small Room) EQ 25-256Hz (-6dB) / 19-278Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1,

RCA 1+2

Dimensions (HxWxD): 600 x 410 x 500mm

Weight: 48.2 kg

Certification: THX Dominus (2), THX Ultra (1)


R212s High Gloss Black
£4,583.33
£5,500.00
MODEL R210s SUBWOOFER

Push-pull active subwoofer. Proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor. 2.4" LCD touchscreen display and smartphone app.

Drivers: (2)250mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB);

Boost (Large Room) EQ 16-256Hz (-6dB) / 14-302Hz (-10dB); Cut

(Small Room) EQ 25-290Hz (-6dB) / 19-302Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Parametric EQ: 10-Band PEQ with 3 user presets

Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Polarity: Normal / inverted

Configurable Auto turn-on and 12V Trigger: XLR 1, XLR 1+2, RCA 1,

RCA 1+2

Dimensions (HxWxD): 545 x 380 x 450mm

Weight: 44.0 kg

Certification: THX Dominus (4), THX Ultra (1)


R210s High Gloss Black
£3,666.67
£4,400.00

Retail Price List - Valid From June 2025

R-Series lineup of single driver based subwoofers use trickle down technology from the flagship D-Series models with new proprietary drivers featuring glass fibre composite diaphragms, massive magnets, and lightweight aluminium voice coils powered by a new 1.0kW amplifier. Control is via a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor, able to react in microseconds ensuring sonic accuracy. All R-Series subs share Perlisten's 2.4" LCD touchscreen display and ability to control advance settings using its App.

R-Series Subwoofers
RETAIL
ex VAT

RETAIL
inc VAT

MODEL R18s

Amplifier: 1.0kW rms
 Driver: 460mm, Glass fibre diaphragm +/-23.7mm linear excursion
 Reference sensitivity: 95dB /150mV/ 1.0m
 Frequency Response: THX EQ 20-288Hz (-6dB) / 16-340Hz (-10dB); Boost (Large Room) EQ 16-288Hz (-6dB) / 14-340Hz (-10dB); Cut (Small Room) EQ 25-288Hz (-6dB) / 19-340Hz (-10dB)
 Inputs: (1) Balanced XLR; (1) Unbalanced RCA
 Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: Variable 0-270°; Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR, RCA
 Dimensions (HxWxD): 618 x 570 x 575mm, Weight: 57.3 kg


MODEL R18s Matte Black
£4,166.67
£5,000.00
MODEL R15s

Amplifier: 1.0kW rms
 Driver: 380mm, Glass fibre diaphragm +/-23.7mm linear excursion
 Reference sensitivity: 92dB /150mV/ 1.0m
 Frequency Response: THX EQ 20-388Hz (-6dB) / 16-468Hz (-10dB); Boost (Large Room) EQ 16-388Hz (-6dB) / 14-468Hz (-10dB); Cut (Small Room) EQ 25-388Hz (-6dB) / 19-468Hz (-10dB)
 Inputs: (1) Balanced XLR; (1) Unbalanced RCA
 Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: Variable 0-270°; Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR, RCA
 Dimensions (HxWxD): 498 x 460 x 465mm; Weight: 35.5 kg


MODEL R15s Matte Black
£3,333.33
£4,000.00

Retail Price List - Valid From June 2025

R-Series Subwoofers

MODEL R12s

Amplifier: 1.0kW rms
Driver: 300mm, Glass fibre diaphragm +/-23.7mm linear excursion
Reference sensitivity: 90dB /150mV/ 1.0m
Frequency Response: THX EQ 20-296Hz (-6dB) / 16-380Hz (-10dB); Boost (Large Room) EQ 16-296Hz (-6dB) / 14-380Hz (-10dB); Cut (Small Room) EQ 25-296Hz (-6dB) / 19-380Hz (-10dB)
Inputs: (1) Balanced XLR; (1) Unbalanced RCA
Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered
Parametric EQ: 10-Band PEQ with 3 user presets
Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
Phase: Variable 0-270°; Polarity: Normal / inverted
Configurable Auto turn-on and 12V Trigger: XLR, RCA
Dimensions (HxWxD): 428 x 390 x 375mm; Weight: 26.7 kg



MODEL R12s Matte Black

£2,500.00

£3,000.00

MODEL R10s

Amplifier: 750W rms
Driver: 250mm, Glass fibre diaphragm +/-20.0mm linear excursion
Reference sensitivity: 88dB /150mV/ 1.0m
Frequency Response: THX EQ 20-301Hz (-6dB) / 16-380Hz (-10dB); Boost (Large Room) EQ 16-301Hz (-6dB) / 14-380Hz (-10dB); Cut (Small Room) EQ 25-301Hz (-6dB) / 19-380Hz (-10dB)
Inputs: (1) Balanced XLR; (1) Unbalanced RCA
Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered
Parametric EQ: 10-Band PEQ with 3 user presets
Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
Phase: Variable 0-270°; Polarity: Normal / inverted
Configurable Auto turn-on and 12V Trigger: XLR, RCA
Dimensions (HxWxD): 388 x 340 x 380mm; Weight: 21.0 kg



MODEL R10s Matte Black

£1,833.33

£2,200.00

Retail Price List - Valid From June 2025
R-Series Subwoofers
Model R8s

Amplifier: 600W rms; Driver: 215 mm (8"), Carbon fibre diaphragm
 Reference sensitivity: 86 dB /150mV/ 1.0m
 Frequency Response: THX EQ: 20-265Hz (-6dB)/16-330Hz (-10dB), Boost (Large Room): 16-265Hz (-6dB)/14-330Hz (-10dB), EQ Cut (Small Room): EQ 25-265Hz (-6dB)/19-330Hz (-10dB)
 Inputs: (1) Balanced XLR, (1) Unbalanced RCA; Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: Variable 0-270°; Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR, RCA
 Dimensions overall (HxWxD): 268 x 270 x 290mm; Weight: 14.4 kg


MODEL R8s Matte Black
£1,333.33
£1,600.00
Perlisten R18is In-Room/IW/OW subwoofer/amp

Versatile vibration isolation mounting solution driven by Perlisten's DSP1500A 1.5kW amplifier and custom DSP with front facing 2.8" colour touchscreen.

Driver: 460 mm (18"), Carbon fibre diaphragm
 Reference sensitivity: TBD dB /150mV/ 1.0m
 Frequency Response: THX EQ: 20-280Hz (-6dB)/16-345Hz (-10dB), Boost (Large Room): 16-280Hz (-6dB)/14-345Hz (-10dB), EQ Cut (Small Room): EQ 25-280Hz (-6dB)/19-345Hz (-10dB)
 Inputs: (1) Balanced XLR, (1) Unbalanced RCA
 Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2
 Parametric EQ: 10-Band PEQ with 3 user presets
 Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct
 Phase: Variable 0-270°; Polarity: Normal / inverted
 Configurable Auto turn-on and 12V Trigger: XLR, RCA
 Subwoofer Dimensions overall (HxWxD): 1000.0 x 508.0 x 306.0mm (without brackets)
 Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm
 Weight: subwoofer 68.9 kg, amplifier 6.1 kg


MODEL R18is Matte Black
£4,583.33
£5,500.00

Retail Price List - Valid From June 2025

Accessories				RETAIL ex VAT	RETAIL inc VAT
SSLR-HGB	S Series stand L/R pair			£1,250.00	£1,500.00
SSC-HGB	S Series Centre stand			£625.00	£750.00
RSLR-HGB	R Series Stand L/R pair			£1,125.00	£1,350.00
RSC-HGB	R Series Centre stand			£541.67	£650.00
R/S-BRCKT	S/R Series wall bracket up to 25kg			£50.00	£60.00
Grille D215s				£158.33	£190.00
Grille D212s				£141.67	£170.00
Grille D15s				£100.00	£120.00
Grille D12s				£95.83	£115.00
Grille R212s				£133.33	£160.00
Grille R210s				£125.00	£150.00
Grille R18s				£116.67	£140.00
Grille R15s				£100.00	£120.00
Grille R12s				£95.83	£115.00
Grille R10s				£87.50	£105.00
Grille R8s				£75.00	£90.00
Grille R-Ser	R Series round grille			£45.83	£55.00
PCK-7i	Pre Install Kit			£125.00	£150.00
PCK -5i	Pre Install Kit			£125.00	£150.00
PCK- 4i	Pre Install Kit			£125.00	£150.00
PCK- 3ic	Pre Install Kit			£125.00	£150.00