

**Retail Price List - Valid From June 2026**

Focussing R&D, marketing and manufacturing at sites across the US, in Denmark and China with over a century of industry experience and leadership, Perlisten Audio offers music and home cinema enthusiasts a completely proprietary path to greater fidelity and value. Perlisten Audio is the first brand in the world to have received THX Dominus Certification, the newest and the largest performance class of THX Certification, designed to bridge the gap between large home theatre speakers and those used in movie houses worldwide.

**Signature Series speakers (priced as singles)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL S7t BLACK EDITION TOWER**

The S7t Black Edition offers several enhancements over S7t including a refined DPC array machined from a single 40mm billet of aluminium for improved thermal coupling, power handling and reduced thermal compression; finer component tolerances, aluminium side panels, substantially increased mass, larger internal cabinet volume and woofer excursion, and new high-performance isolation feet.

Enclosure Alignment 4-way bass reflex / acoustic suspension

Dimensions (HxWxD): 1332.5 x 365.0 x 475.8mm

Weight 112.3kg

Other specs as per S7t


**S7t Black Edition Satin Black Anodised Aluminium**
**£11,666.67**
**£14,000.00**
**MODEL S7t TOWER**

Featuring proprietary DPC-Array of 28mm Beryllium dome and dual 28mm TPCD ultra-lightweight domes. All transducers are developed ground up by our engineers. Custom bass drivers made from thin-ply carbon diaphragms (TPCD) can be configured as bass reflex or acoustic suspension and adjusted for listener preference. **World's first loudspeakers to be certified for THX Dominus.**

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD

Sensitivity: 92dB/2.83V/1.0m

Frequency Response (+/-2dB): 80-20kHz

Dimensions (HxWxD): 1295x240x400mm

Weight: 55.7 kg

Recommended Amplifier Power: 100-600W RMS

Certification: THX Dominus - large LCR


**S7t High Gloss Ebony, Gunmetal Grey**
**£8,750.00**
**£10,500.00**
**S7t High Gloss Black**
**£7,500.00**
**£9,000.00**

**Retail Price List - Valid From June 2026**
**Signature Series speakers (priced as singles)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL S7c CENTRE**

**FSimilar driver complement to the flagship S7T. THX Dominus certified.**

Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (4) Textreme TPCD

Sensitivity: 92dB/2.83V/1.0m

Frequency Response (+/-2dB): 80-20kHz

Dimensions (HxWxD): 960x240x400mm

Weight: 33.5 kg

Certification: THX Dominus - LCR


**High Gloss Ebony**
**£7,000.00**
**£8,400.00**
**High Gloss Black**
**£6,250.00**
**£7,500.00**
**MODEL S5t TOWER**
**A smaller version of the S7t with nearly the same SPL, sensitivity, and low frequency output.**

Driver complement: Flagship DPC-Array: 28mm (1) Beryllium; 28mm (2) Textreme TPCD; Woofers: 180mm(2) Textreme TPCD

Sensitivity: 89.5dB / 2.83v / 1.0m

Frequency Response (-10dB): Bass reflex: 24 - 32kHz; Acoustic suspension: 36 - 32kHz

Dimensions (HxWxD): 1119 x 240 x 400mm

Weight 43.2 kg

Certification: THX Dominus, THX Ultra


**High Gloss Ebony**
**£6,833.33**
**£8,200.00**
**High Gloss Black**
**£5,916.67**
**£7,100.00**
**MODEL S5c CENTRE**

**A world class centre for slightly smaller rooms and screens, similar to the S7c with nearly the same SPL, sensitivity, and low frequency output.**

Driver complement: Flagship DPC Array: 28mm (1) Beryllium; 28mm (2) Textreme TPCD

Sensitivity: 88.8dB / 2.83v / 1.0m

Frequency Response (-10dB): 42 - 34kHz







Dimensions (HxWxD): 4240 x 596 x 300mm

Weight: 21.4 kg

Certification: THX Dominus, THX Ultra


**High Gloss Ebony**
**£5,375.00**
**£6,450.00**
**High Gloss Black**
**£4,583.33**
**£5,500.00**

**Retail Price List - Valid From June 2026**

Signature Series speakers (priced as singles)			RETAIL ex VAT	RETAIL inc VAT
<b>MODEL S5m MONITOR</b> <b>Features Perlisten DPC array and two 180mm Textreme TPCD woofers. THX Dominus certified.</b> Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (2) Textreme TPCD Sensitivity: 89.6dB/2.83V/1.0m Frequency Response (+/-1.5dB): 80-20kHz Dimensions (HxWxD) without stand: 600x240x400mm Weight: 19.0 kg Certification: THX Dominus; THX Ultra			 	
High Gloss Ebony			£5,750.00	£6,900.00
High Gloss Black			£4,916.67	£5,900.00
<b>MODEL S4b BOOKSHELF</b> <b>For use in 2.1 systems or as surround, height or LCR in a cinema system using subwoofers. Bookshelf, stand or on-wall mounting with keyhole or available bracket. Features DPC-Array and single 180mm Textreme TPCD woofer. THX Dominus certified.</b> Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (1) Textreme TPCD Sensitivity: 85.4dB / 2.83V / 1.0m Frequency Response (+/-1.5dB): 100 - 20kHz Dimensions (HxWxD) without stand: 420 x 240 x 185mm Weight: 11.0 kg Certification: THX Dominus			 	
High Gloss Ebony			£3,583.33	£4,300.00
High Gloss Black			£2,916.67	£3,500.00
<b>MODEL S4s SURROUND</b> <b>Designed for on-wall or flushed-in (2pi) applications as surround, height or LCR. High sensitivity, power handling and low distortion make S4s the ideal choice as a surround speaker for high-end cinemas. Features DPC-Array and single single 180mm Textreme TPCD woofer. THX Dominus certified.</b> Driver complement: Flagship DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (1) Textreme TPCD Sensitivity: 89.6dB/2.83V/1.0m Frequency Response (+/-1.5dB): 100 - 20kHz Dimensions (HxWxD) without stand: 405x240x185mm Weight: 9.5 kg Certification: THX Dominus; THX Ultra			 	
High Gloss Ebony			£3,500.00	£4,200.00
High Gloss Black			£2,916.67	£3,500.00


**Retail Price List - Valid From June 2026**

**Dominus certified in-wall speaker (single)**

**Perlisten S7i-LR**

The award-winning flagship S7t design adapted for THX Dominus Certified in-wall applications.

Driver complement: DPC Array: 28mm Beryllium, 28mm (2)  
 Textreme TPCD; Woofers: 180mm (4) Textreme TPCD  
 Sensitivity: 91.9dB / 2.83V / 1.0m  
 Frequency Response (-10dB): 45 - 37kHz  
 Dimensions (HxWxD): 1036.6 x 298.6 x 111.2mm  
 Mounting Dimensions (HxWxD): 996 x 257 x 101.7mm  
 Weight: 26.4 kg  
 Certification: THX Dominus



S7i-LR

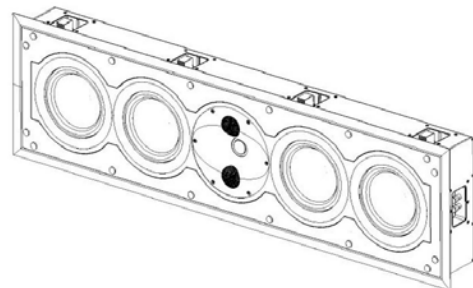
£6,208.33

£7,450.00

**Perlisten S7i-C**

The award-winning flagship S7t design adapted for THX Dominus Certified in-wall centre-channel applications.

Driver complement: DPC Array: 28mm Beryllium, 28mm (2)  
 Textreme TPCD; Woofers: 180mm (4) Textreme TPCD  
 Sensitivity: 92.0dB / 2.83V / 1.0m  
 Frequency Response (-10dB): 45 - 37kHz  
 Dimensions (HxWxD): 298.6 x 1036.6 x 111.2mm  
 Mounting Dimensions (HxWxD): 257 x 996 x 101.7mm  
 Weight: 26.4 kg  
 Certification: THX Dominus



S7i-C

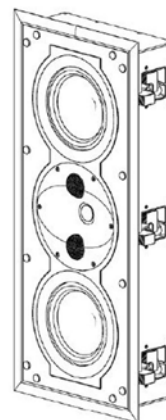
£6,208.33

£7,450.00

**Perlisten S5i-LR**

The award-winning S5m design adapted for THX Dominus Certified in-wall applications.

Driver complement: DPC Array: 28mm Beryllium, 28mm (2)  
 Textreme TPCD; Woofers: 180mm (2) Textreme TPCD  
 Sensitivity: 91.9dB / 2.83V / 1.0m  
 Frequency Response (-10dB): 52 - 37kHz  
 Dimensions (HxWxD): 624 x 257 x 101.7mm  
 Mounting Dimensions (HxWxD): 624 x 257 x 101.7mm  
 Weight: 15.9 kg  
 Certification: THX Dominus



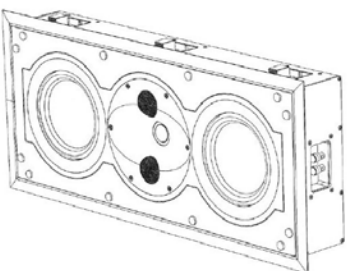


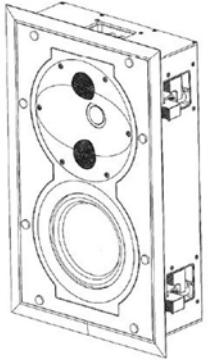


S5i-LR

£5,250.00

£6,300.00

**Retail Price List - Valid From June 2026**

Dominus certified in-wall speaker (single)		RETAIL ex VAT	RETAIL inc VAT
<p><b>Perlisten S5i-C</b></p> <p>The award-winning S5m design adapted for THX Dominus Certified in-wall centre channel applications.</p> <p>Driver complement: DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (2) Textreme TPCD</p> <p>Sensitivity: 91.6dB / 2.83V / 1.0m</p> <p>Frequency Response (-10dB): 50 - 37kHz</p> <p>Dimensions (HxWxD): 298 x 665 x 111mm</p> <p>Mounting Dimensions (HxWxD): 257 x 624 x 101.7mm</p> <p>Weight: 15.9 kg</p> <p>Certification: THX Dominus</p>		 	
S5i-C		£5,250.00	£6,300.00
<p><b>Perlisten S4i-LCRS</b></p> <p>The award-winning S4s/S4b designs adapted for THX Dominus Certified in-wall surround channel applications.</p> <p>Driver complement: DPC Array: 28mm Beryllium, 28mm (2) Textreme TPCD; Woofers: 180mm (1) Textreme TPCD</p> <p>Sensitivity: 88.0dB / 2.83V / 1.0m</p> <p>Frequency Response (-10dB): 42 - 37kHz</p> <p>Dimensions (HxWxD): 479 x 298 x 111mm</p> <p>Mounting Dimensions (HxWxD): 438 x 257 x 101.7mm</p> <p>Weight: 11.2 kg</p> <p>Certification: THX Dominus Surround, Ultra LCR</p>		 	
S4i-LCRS		£3,125.00	£3,750.00
<b>On-Wall Adaptor Frames for In-Wall speakers</b>		RETAIL ex VAT	RETAIL inc VAT
7i OWF MW	on wall frame Matt White for 7 series	£416.67	£500.00
5i OWF MW	on wall frame Matt White for 5 series	£333.33	£400.00
4i OWF MW	on wall frame Matt White for 4 series	£250.00	£300.00



**Retail Price List - Valid From June 2026**

**Dominus/Ultra certified in-ceiling speakers (single)**

RETAIL  
ex VAT

RETAIL  
inc VAT

**S3ic In-Ceiling**

A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, and extremely versatile as LCR, surround, height or wide channel speaker, the S3ic is optimised for in-ceiling applications where a 30 degree reference axis within a larger listening window is desired.

Driver complement: DPC Array: 28mm Beryllium tweeter; 28mm Textreme TPCD mid; Woofer: 165mm Alum frame, Textreme TPCD  
Sensitivity: 89.7dB / 2.83v / 1.0m  
Frequency Response: 57 - 30kHz (-6dB); 43 - 33kHz (-10dB)  
Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth  
Recommended cutout: 305mm diameter Weight: 9.4kg  
Certification: THX Dominus, THX Ultra



S3ic in-ceiling

£2,833.33

£3,400.00



**Retail Price List - Valid From June 2026**
**Reference Series speakers (priced as singles)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R7t TOWER**

Two-channel high fidelity speaker with the versatility to be used in multi-channel systems. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers, which can be aligned as bass reflex or acoustic suspension depending on specific tastes. THX Dominus certified.

Driver complement: DPC-Array: 26mm(3) Silk dome, woofers: 165mm (4) HPF diaphragms  
 Sensitivity: 90.0dB/2.83V/1.0m  
 Frequency Response (-10dB): Bass reflex: 27 - 32kHz; Acoustic suspension: 38 - 32kHz  
 Dimensions (HxWxD): 1268 x 230 x 350mm Weight: 48.0 kg  
 Certification: THX Dominus; THX Ultra


**R7t High Gloss Black**
**£3,666.67**
**£4,400.00**
**MODEL R5t TOWER**

Two-channel high fidelity speaker with the versatility to be used in multi-channel systems. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers, which can be aligned as bass reflex or acoustic suspension depending on specific tastes. THX Dominus certified.

Driver complement: DPC Array: 26mm(3) Silk dome, woofers: 165mm (2) HPF diaphragms  
 Sensitivity: 89dB/2.83V/1.0m  
 Frequency Response (+/-2dB): 80 - 20kHz  
 Dimensions (HxWxD): 1100x230x350mm Weight: 26.5 kg  
 Certification: THX Dominus; THX Ultra


**R5t High Gloss Black**
**£2,875.00**
**£3,450.00**

**Retail Price List - Valid From June 2026**
**Reference Series speakers (priced as singles)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**Perlisten R7c CENTRE**

Sharing "trickle-down" technology from Perlisten's flagship S-Series, a centre channel for R-Series speakers, the R7t and R5t in particular.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 90.2 dB / 2.83V / 1.0m

Frequency Response (-10dB): 36 - 32kHz

Dimensions (HxWxD): 230 x 920 x 300mm

Weight: 36.8 kg

Finish: Piano High Gloss Black


**R7C High Gloss Black**
**£3,166.67**
**£3,800.00**
**MODEL R5c CENTRE**

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers. THX Dominus certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers:

165mm(2) HPF diaphragms

Sensitivity: 88.6dB/2.83V/1.0m

Frequency Response (-10dB): 49 - 32kHz

Dimensions (HxWxD): 240 x 550 x 270mm

Weight: 15.0 kg

Certification: THX Dominus, THX Ultra


**R5c High Gloss Black**
**£2,000.00**
**£2,400.00**
**MODEL R5m MONITOR**

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and twin 165mm HFP woofers. THX Dominus certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers:

165mm

(2) HPF diaphragms

Sensitivity: 89.2dB/2.83V/1.0m

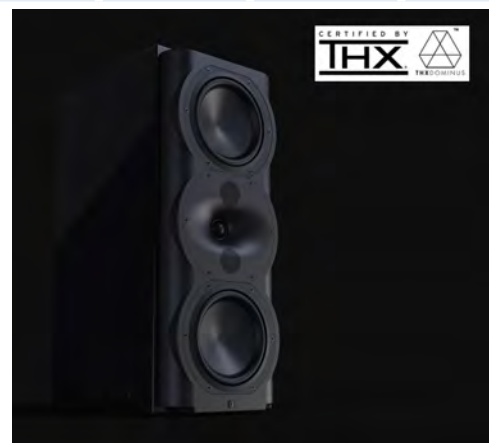
Frequency Response (-10dB): bass reflex: 40 - 32kHz; acoustic

suspension: 47 - 32kHz

Dimensions (HxWxD): 546 x 230 x 336mm

Weight: 17.5 kg

Certification: THX Dominus, THX Ultra


**R5m High Gloss Black**
**£2,000.00**
**£2,400.00**

**Retail Price List - Valid From June 2026**

**Reference Series speakers (priced as singles)**

RETAIL  
ex VAT

RETAIL  
inc VAT

**MODEL R4b BOOKSHELF**

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm

HPF diaphragm

Sensitivity: 84.6dB/2.83V/1.0m

Frequency Response (-10dB): 45 - 32kHz

Dimensions (HxWxD): 382 x 230 x 336mm

Weight: 9.5 kg

Certification: THX Ultra



**R4b High Gloss Black**

£1,416.67

£1,700.00

**MODEL R4s SURROUND/HEIGHT**

Designed to be mounted on optional stand, or wall mounted using dedicated tilt/swivel bracket. Featuring DPC-Array of three 26mm silk domes and single 165mm HFP woofer. THX Ultra certified.

Driver complement: DPC-Array: 26mm (3) Silk dome, woofers: 165mm

HPF diaphragm

Sensitivity: 86.5dB/2.83V/1.0m

Frequency Response (-10dB): 48 - 32kHz

Dimensions (HxWxD): 378 x 230 x 173mm

Weight: 9.5 kg

Certification: THX Ultra



**R4s High Gloss Black**

£1,250.00

£1,500.00

**Retail Price List - Valid From June 2026**
**R Series IW speakers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**Perlisten R7i L/R**

Based largely on the R7t, adapted for inwall applications. Shallow 4" mounting depth and integral aluminium extrusion rear enclosure ensure consistent performance and minimal sound propagation to adjacent rooms.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 89.9 dB / 2.83V / 1.0m

Frequency Response (-10dB): 42 - 32kHz

Dimensions (HxWxD): 1032.0 x 293.0 x 120.8mm Weight: 23.1 kg

Finish: matte black aluminium with white grille


**R7i LR Matte Black**
**£2,916.67**
**£3,500.00**
**Perlisten R7i C CENTRE**

Based largely on the R7t, adapted for inwall applications. Shallow 4" mounting depth and integral aluminium extrusion rear enclosure ensure consistent performance and minimal sound propagation to adjacent rooms.

Driver complement: DPC-Array: 26mm (3) Silk dome, Woofers 165mm (4) HPF diaphragms

Sensitivity: 90.1 dB / 2.83V / 1.0m

Frequency Response (-10dB): 42 - 32kHz

Dimensions (HxWxD): 293.0 x 1032.0 x 120.8mm

Weight: 23.1 kg

Finish: matte black aluminium with white grille


**R7i C Matte Black**
**£2,916.67**
**£3,500.00**
**Perlisten R5i-LR**

The R5m design adapted for THX Dominus Certified in-wall applications.

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF

Sensitivity: 89.2dB / 2.83V / 1.0m

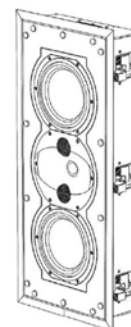
Frequency Response (-10dB): acoustic suspension 39 - 32kHz

Dimensions (HxWxD): 665 x 298 x 111mm

Mounting Dimensions (HxWxD): 624 x 257 x 101.7mm

Weight: 15.9 kg

Certification: THX Dominus, THX Ultra


**R5i-LR Matte Black**
**£2,000.00**
**£2,400.00**

**Retail Price List - Valid From June 2026**
**R Series IW speakers (single)**
**Perlisten R5i-C CENTRE**

The R5c design adapted for THX Dominus Certified in-wall applications.

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (2) HPF

Sensitivity: 89.4dB / 2.83V / 1.0m

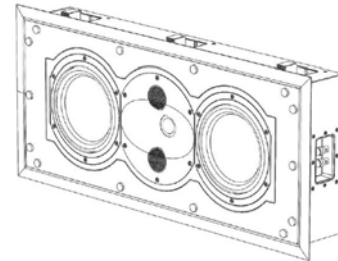
Frequency Response (-10dB): acoustic suspension 40 - 32kHz

Dimensions (HxWxD): 298 x 665 x 111mm

Mounting Dimensions (HxWxD): 257 x 624 x 101.7mm

Weight: 15.9 kg

Certification: THX Dominus, THX Ultra


**R5i-C Matte Black**
**£2,000.00**
**£2,400.00**
**Perlisten R4i-LCRS**

The R4s/R4b designs adapted for THX Dominus Certified in-wall surround channel applications.

Driver complement: DPC Array: 26mm (3) Silk Dome; Woofers: 165mm (1) HPF

Sensitivity: 88.8dB / 2.83V / 1.0m

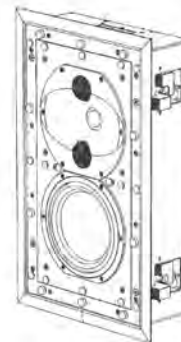
Frequency Response (-10dB): 46 - 37kHz

Dimensions (HxWxD): 479 x 298 x 111mm

Mounting Dimensions (HxWxD): 438 x 257 x 101.7mm

Weight: 11.2 kg

Certification: THX Dominus Surround, THX Ultra LCR


**R4i-LCRS Matte Black**
**£1,500.00**
**£1,800.00**
**On-Wall Adaptor Frames for In-Wall speakers**
**RETAIL  
ex VAT**
**RETAIL  
inc VAT**
**7i OWF MW**     on wall frame Matt White for 7 series

**£416.67**
**£500.00**
**5i OWF MW**     on wall frame Matt White for 5 series

**£333.33**
**£400.00**
**4i OWF MW**     on wall frame Matt White for 4 series

**£250.00**
**£300.00**


**Retail Price List - Valid From June 2026**
**Dominus/Ultra certified in-ceiling speakers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**R3ic In-Ceiling**

**A perfect solution for high-end Dolby Atmos, DTS-X and Auro-3D applications and extremely versatile as LCR, surround, height or wide channel speaker.**

Driver complement: DPC Array: 28mm silk dome tweeter; 28mm silk dome mid woofers; 165mm Alum frame, HFP pulp

Sensitivity: 88.8dB / 2.83v / 1.0m

Frequency Response: 59 - 30kHz (-6dB); 46 - 33kHz (-10dB)

Overall Dimensions (with grille) mm: 343.3 dia x 194.8 depth;

Recommended cutout: 305mm diameter

Weight: 9.4kg

Certification: THX Dominus, THX Ultra


**R3ic Matte Black**
**£1,500.00**
**£1,800.00**
**R2ic In-Ceiling**

**A great solution for high-end Dolby Atmos, DTS-X and Auro-3D applications, the THX Ultra certified R2ic is a simplified 2-way version of the R3ic.**

Driver complement: DPC Array: 28mm Silk Dome; Woofers: 165mm (1) HPF

Sensitivity: 86.0dB / 2.83V / 1.0m

Frequency Response (-10dB): 31 - 32kHz

Dimensions (with grille mm): 343.3 dia x 153.1 depth; Recommended cutout mm: 305 dia

Weight: 5.4kg

Certification: THX Ultra


**R2ic Matte Black**
**£916.67**
**£1,100.00**

**Retail Price List - Valid From June 2026**
**A Series (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**PERLISTEN A4t TOWER**

The A4t is a floor-standing speaker that features a bespoke 35mm composite Teteron dome tweeter mounted in a unique waveguide, along with three bespoke 215mm carbon fibre woofers in a bass reflex enclosure. The A4t also has a custom-engineered crossover and cabinet.

Enclosure Alignment: 2.5-way Bass Reflex

Driver complement: Tweeter: 35mm, composite Teteron dome; Woofers: (3) 215mm, carbon fibre diaphragm

Sensitivity: 88.6dB / 2.83v / 1.0m

Impedance: 4Ω nominal / 3.1Ω min

Response Linearity: 100 - 10kHz +/-2.0dB window

Frequency Response: 35 - 27kHz (-6dB); 28 - 27kHz (-10dB)

Typical In Room bass extension: 28 Hz (-6dB); 19 Hz (-10dB)

Recommended Amplifier Power: 50 - 350W

SPL capability @1m (100-20kHz): 114.0dB peak; 111.0dB peak <3% 2nd, 3rd Harmonics

Overall Dimensions H x W x D mm: 1285 x 280 x 450

Satin Black finish, optional grilles


**PERLISTEN A4t TOWER**
**£2,500.00**
**£3,000.00**
**Optional Grille for A4t (each)**
**£108.33**
**£130.00**
**PERLISTEN A3t TOWER**

The A3t is a floor-standing speaker that features a 35mm composite Teteron dome tweeter mounted in a unique waveguide, along with two 215mm carbon fibre woofers in a bass reflex cabinet.

Enclosure Alignment: 2-way Bass Reflex

Driver complement: Tweeter: 35mm, composite Teteron dome; Woofers: (2) 215mm, carbon fibre diaphragm

Sensitivity: 87.7dB / 2.83v / 1.0m

Impedance: 4Ω nominal / 3.0Ω min

Response Linearity: 100 - 10kHz +/-2.0dB window

Frequency Response: 31 - 27kHz (-6dB); 22 - 27kHz (-10dB)

Typical In Room bass extension: 26 Hz (-6dB); 17 Hz (-10dB)

Recommended Amplifier Power: 50 - 300W

SPL capability @1m (100-20kHz): 112.5dB peak; 111.0dB peak <3% 2nd, 3rd Harmonics

Overall Dimensions H x W x D mm: 1285 x 280 x 390

Satin Black finish, optional grilles


**PERLISTEN A3t TOWER**
**£1,916.67**
**£2,300.00**
**Optional Grille for A3t (each)**
**£108.33**
**£130.00**

**Retail Price List - Valid From June 2026**
**A Series (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**PERLISTEN A3m MONITOR**

The A3m is designed to be mounted directly to the wall or ceiling mounted using our tilt swivel bracket. This product utilises a 35mm composite Teteron dome tweeter mounted in our unique waveguide and twin 215mm carbon fibre woofers.

Enclosure Alignment: 2-way acoustic suspension

Driver complement: Tweeter: 35mm, composite Teteron dome; Woofers: (2) 215mm, carbon fibre diaphragm

Sensitivity: 87.4dB / 2.83v / 1.0m

Impedance: 4Ω nominal / 3.0Ω min

Response Linearity: 100 - 10kHz +/-2.0dB window

Frequency Response: 41 - 30kHz (-6dB); 44 - 33kHz (-10dB)

Typical In Room bass extension: 40 Hz (-6dB); 31 Hz (-10dB)

Recommended Amplifier Power: 50 - 250W

SPL capability @1m (100-20kHz): 111.4dB peak; 111.0dB peak <3% 2nd, 3rd Harmonics

Overall Dimensions H x W x D mm: 675 x 280 x 350

Satin Black finish, optional grilles


**PERLISTEN A3m MONITOR**
**£1,125.00**
**£1,350.00**
**Optional Grille for A3m (each)**
**£66.67**
**£80.00**
**PERLISTEN A2s SURROUND SPEAKER**

Specially designed for use in surround applications, the A2s can be mounted directly to the wall or mounted to the ceiling using our tilt swivel bracket. This product utilises a 35mm composite Teteron dome tweeter mounted in our unique waveguide and a 215mm carbon fibre woofer.

Enclosure Alignment: 2-way acoustic suspension

Driver complement: Tweeter: 35mm, composite Teteron dome; Woofers: (1) 215mm, carbon fibre diaphragm

Sensitivity: 86.8dB / 2.83v / 1.0m

Impedance: 6Ω nominal / 4.5Ω min

Response Linearity: 100 - 10kHz +/-2.5dB window

Frequency Response: 59 - 30kHz (-6dB); 47 - 33kHz (-10dB)

Typical In Room bass extension: 50 Hz (-6dB); 41 Hz (-10dB)

Recommended Amplifier Power: 50 - 200W

SPL capability @1m (100-20kHz): 109.2dB peak; 109.0dB peak <3% 2nd, 3rd Harmonics

Satin Black finish, optional grilles


**PERLISTEN A2s SURROUND SPEAKER**
**£812.50**
**£975.00**
**Optional Grille for A2s (each)**
**£58.33**
**£70.00**

**Retail Price List - Valid From June 2026**
**X-Series on-wall and in-wall speakers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**X5w on-wall speaker**

**Flagship X-series on-wall speaker delivering the most precise vertical and horizontal control in the lineup.**

Features and specs:

Enclosure Alignment: 3-way Acoustic Suspension

38mm Silk Dome tweeter in a custom waveguide for controlled vertical and horizontal wide dispersion

5.5" Carbon Fibre woofer x 4 (two with high excursion)

Sensitivity: 92dB 2.83v@1m

Impedance: 4 Ohms

Frequency Response: 60Hz-30kHz

Recommended Amplifier Power: 50 - 200 watts

Dimensions (HxWxD): 740 x 200 x 100mm

Weight: 20 kg

Finishes: Satin Black, Satin White


**X5W - ON WALL**
**£1,166.67**
**£1,400.00**
**X3w on-wall speaker**

**The X3 on-wall is perfectly sized for compact stereo and immersive audio setups. Dual woofers flanking the tweeter provide precise vertical and horizontal dispersion.**

Features and specs:

Enclosure Alignment: 2-way Acoustic Suspension

38mm Silk Dome tweeter in a custom waveguide for controlled vertical and horizontal wide dispersion

5.5" Carbon Fibre woofer x 2

Sensitivity: 89dB 2.83v@1m

Impedance: 4 Ohms

Frequency Response: 60Hz-30kHz

Recommended Amplifier Power: 50 - 200 watts

Dimensions (HxWxD): 450 x 200 x 100mm

Weight: 9 kg

Finishes: Satin Black, Satin White


**X3W - ON WALL**
**£833.33**
**£1,000.00**
**X3iw in-wall speaker**

**Designed as a higher-output in-wall option in the X-Series, the X3iw shares the same design philosophy as the X3w, offering exceptional timbre matching throughout any X-Series system for cohesive, natural performance.**

Features and specs:

TBA

Finishes: Satin Black


**X3iW - IN WALL**
**£916.67**
**£1,100.00**

**Retail Price List - Valid From June 2026**
**X-Series on-wall and in-wall speakers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**X2w on-wall speaker**

A compact on-wall speaker designed for any setting, ideal for stereo music, enhancing TV audio, or creating a space-saving immersive sound system.

Features and specs:

Enclosure Alignment: 2-way Acoustic Suspension

38mm Silk Dome tweeter in a custom waveguide for controlled vertical and horizontal wide dispersion

5.5" Carbon Fibre woofer

Sensitivity: 88dB 2.83v@1m

Impedance: 4 Ohms

Frequency Response: 60Hz-30kHz

Recommended Amplifier Power: 50 - 200 watts

Dimensions (HxWxD): 330 x 200 x 100mm

Weight: 7 kg

Finishes: Satin Black, Satin White


**X2W - ON WALL**
**£666.67**
**£800.00**
**X2ic in-ceiling speaker**

Two-way in-ceiling speaker using the waveguide developed for the A-Series for wide dispersion and excellent on and off axis response.

Features and specs:

Enclosure Alignment: 2-way infinite baffle

38mm Silk Dome tweeter in a custom waveguide for controlled vertical and horizontal wide dispersion

6.5" Carbon Fibre woofer

Sensitivity: 90dB 2.83v@1m

Impedance: 4 Ohms

Frequency Response: 60Hz-30kHz

Recommended Amplifier Power: 50 - 200 watts

Dimensions (Width): 165 mm

Finishes: Satin Black


**X2iC - IN CEILING**
**£583.33**
**£700.00**
**Processors**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**DSPx**

A standalone digital signal processor designed explicitly for the high-end stereo and home theatre world. It allows users to properly integrate passive left and right speakers with subwoofers by managing delays and providing room correction to solve acoustic imperfections.

Features and specs:

TBA

**DSPx**
**TBA**
**TBA**

**Retail Price List - Valid From June 2026**
**D-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D215s SUBWOOFER**

Push-pull driver configuration. Carbon fibre composite diaphragms. Aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. All D-Series subs feature a 2.4" LCD touchscreen display and the ability to control advance settings using Perlisten's App. THX Dominus certified.

Alignment: Push-Pull, acoustic suspension

Amplifier: 3.0kW RMS short term

Driver complement: (2) 380mm Carbon fibre diaphragm, +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-200Hz (-6dB) / 16-210Hz (-10dB);

Boost (Large Room) EQ 15-200Hz (-6dB) / 13-210Hz (-10dB); Cut (Small Room) EQ 24-200Hz (-6dB) / 18-210Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 805 x 500 x 650.5mm Weight: 92.0 kg

Certification: THX Dominus


**D215s High Gloss Black**
**£7,666.67**
**£9,200.00**
**D215s Matte Black**
**£7,083.33**
**£8,500.00**
**MODEL D212s SUBWOOFER**

Push-pull driver configuration. Carbon fibre composite diaphragms. Aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. Proprietary 3.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. All D-Series subs feature a 2.4" LCD touchscreen display and the ability to control advance settings using Perlisten's App. THX Dominus certified.

Alignment: Push-Pull, acoustic suspension

Amplifier: 3.0kW RMS short term

Driver complement: (2) 300mm, Carbon fibre diaphragm +/-30mm linear excursion

Frequency Response: THX EQ 20-231Hz (-6dB) / 16-245Hz (-10dB); Boost

(Large Room) EQ 15-231Hz (-6dB) / 13.5-245Hz (-10dB); Cut (Small Room) EQ 24-231Hz (-6dB) / 18-245Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 668 x 420 x 550mm Weight: 68.0 kg

Certification: THX Dominus


**D212s High Gloss Black**
**£5,833.33**
**£7,000.00**

**Retail Price List - Valid From June 2026**
**D-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL D15s SUBWOOFER**

The D15s is the smallest single THX Dominus certified sub available. Proprietary 2.0kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. Carbon fibre composite diaphragms, multiple aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. 2.4" LCD touchscreen display and Perlisten App control.



Amplifier: 2.0kW RMS short term

Driver compliment: 380mm, Carbon fibre diaphragm +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-320Hz (-6dB) / 16-395Hz (-10dB); Boost (Large Room) EQ 16-320Hz (-6dB) / 14-395Hz (-10dB); Cut (Small Room) EQ 24-320Hz (-6dB) / 18-395Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 528 x 500 x 500mm

Weight: 46.0 kg

Certification: THX Dominus

**D15s High Gloss Black**
**£4,583.33**
**£5,500.00**
**MODEL D12s SUBWOOFER**

The smallest subwoofer in the series yet packs enough punch to be certified THX Dominus using a pair of D12s subs. Proprietary 1.5kW amplifier controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor. Carbon fibre composite diaphragms, multiple aluminium shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminium voice coils. 2.4" LCD touchscreen display and Perlisten App control.



Amplifier: 1.5kW rms short term

Driver complement: 300mm, Carbon fibre diaphragm +/-30mm linear excursion

Reference sensitivity: 92dB / 150mV/ 1.0m

Frequency Response: THX EQ 20-289Hz (-6dB) / 16-330Hz (-10dB); Boost (Large Room) EQ 16-289Hz (-6dB) / 14-330Hz (-10dB); Cut (Small Room) EQ 25-289Hz (-6dB) / 19-330Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 448 x 420 x 450mm

Weight: 41.0 kg

Certification: THX Dominus (in pairs)

**D12s High Gloss Black**
**£3,500.00**
**£4,200.00**

**Retail Price List - Valid From June 2026**
**D-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**Perlisten D3is IW/OW subwoofer/amp**

Designed for applications where space is a premium, the D3is works equally well mounted in-wall or on-wall. Proprietary isolation mounts and brackets are designed into the enclosure to reduce overall vibration and noise from transmitting to the adjacent wall. Powered by Perlisten's 1500W amplifier now in its own chassis, utilizing a larger 2.8" LCD touchscreen display. Rack mounting hardware is included. Common to all Perlisten subs, all functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor, able to react in microseconds ensuring sonic accuracy.

Amplifier: 1500W rms

Driver complement: (3)215mm (8.5"), Carbon fibre diaphragm

Reference sensitivity: 89.5 dB /150mV/ 1.0m

Frequency Response: THX EQ: 20-290Hz (-6dB)/16-350Hz (-10dB), Boost (Large Room): 17-290Hz (-6dB)/15-350Hz (-10dB), EQ Cut (Small Room): EQ 31-290Hz (-6dB)/23-350Hz (-10dB)

Inputs: (1) Balanced XLR, (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2

Subwoofer Dimensions overall (HxWxD): 920.8 x 355.6 x 146.1mm (without brackets)

Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm

Weight: subwoofer 39.7 kg, amplifier 6.1 kg


**D3is Matt Black**
**£4,583.33**
**£5,500.00**
**Perlisten D8is In-Room/IW/OW subwoofer/amp**

Push-Pull design utilising a unique array of (8)215mm or 8.5" drivers and a proprietary, versatile vibration isolation mounting solution. Driven by Perlisten's DSP3000A 3kW amplifier and custom DSP. Housed in a hybrid aluminium/steel chassis and front facing 2.8" colour touchscreen, the amp can be conveniently located on display in-room or hidden away in a separate room with other rack mounted components

Drivers: (8)215mm (8.5"), Carbon fibre diaphragm; Reference sensitivity: 97.0 dB /150mV/ 1.0m; Frequency Response: THX EQ: 20-290Hz (-6dB)/16-330Hz (-10dB), Boost (Large Room): 16-290Hz (-6dB)/14-330Hz (-10dB), EQ Cut (Small Room): EQ25-290Hz (-6dB)/19-330Hz (-10dB); Inputs: (1) Balanced XLR, (1) Unbalanced RCA; Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2; Parametric EQ: 10-Band PEQ with 3 user presets; Low Pass filter: Bypass, 30-160Hz, slope 6,12,18,24dB/oct; Phase: Variable 0-270°; Polarity: Normal / inverted; Configurable Auto turn-on and 12V Trigger: XLR, RCA; Subwoofer Dimensions overall (HxWxD): 1137.6 x 508.0 x 238.6mm (without brackets); Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm; Weight: subwoofer 103.8 kg, amplifier 6.1 kg


**D8is Matt Black**
**£15,000.00**
**£18,000.00**
**D8is Base (stand for D8is)**
**£666.67**
**£800.00**

**Retail Price List - Valid From June 2026**
**R-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R212s SUBWOOFER**

The R212s is a 2x12" push-pull active subwoofer, powered by a proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor. Control is via 2.4" LCD touchscreen display and smartphone app. Certified THX Dominus when two R212s subs are used.

Alignment: Push-Pull, acoustic suspension

Amplifier: 1.3kW rms short term

Driver complement: (2)300mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB);

Boost (Large Room) EQ 16-256Hz (-6dB) / 14-278Hz (-10dB); Cut

(Small Room) EQ 25-256Hz (-6dB) / 19-278Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 600 x 410 x 500mm

Weight: 48.2 kg

Certification: THX Dominus (2), THX Ultra (1)

Available finishes: High Gloss Black


**R212s High Gloss Black**
**£4,583.33**
**£5,500.00**
**MODEL R210s SUBWOOFER**

The R210s is a 2x10" push-pull active subwoofer, powered by a proprietary 1.3kW amplifier. All functions and safeties are controlled by a 48-bit data path DSP and 32-bit ARM M4 Cortex processor. Control is via 2.4" LCD touchscreen display and smartphone app. Certified THX Dominus when four R210s subs are used.

Alignment: Push-Pull, acoustic suspension

Amplifier: 1.3kW rms short term

Driver complement: (2)250mm, Glass fibre diaphragm +/-20mm linear excursion

Frequency Response: THX EQ 20-256Hz (-6dB) / 16-278Hz (-10dB);

Boost (Large Room) EQ 16-256Hz (-6dB) / 14-302Hz (-10dB); Cut

(Small Room) EQ 25-290Hz (-6dB) / 19-302Hz (-10dB)

Inputs: (2) Balanced XLR; (2) Unbalanced RCA

Outputs: (2) Balanced XLR unbuffered; (2) Unbalanced RCA unbuffered

Dimensions (HxWxD): 545 x 380 x 450mm

Weight: 44.0 kg

Certification: THX Dominus (4), THX Ultra (1)

Available finishes: High Gloss Black


**R210s High Gloss Black**
**£3,666.67**
**£4,400.00**

**Retail Price List - Valid From June 2026**

R-Series lineup of single driver based subwoofers use trickle down technology from the flagship D-Series models with new proprietary drivers featuring glass fibre composite diaphragms, massive magnets, and lightweight aluminium voice coils powered by a new 1.0kW amplifier. Control is via a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor, able to react in microseconds ensuring sonic accuracy. All R-Series subs share Perlisten's 2.4" LCD touchscreen display and ability to control advance settings using its App.

**R-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R18s**

Amplifier: 1.0kW rms

Driver complement: 460mm, Glass fibre diaphragm +/-23.7mm linear excursion

Reference sensitivity: 95dB /150mV/ 1.0m

Frequency Response: THX EQ 20-288Hz (-6dB) / 16-340Hz (-10dB);

Boost (Large Room) EQ 16-288Hz (-6dB) / 14-340Hz (-10dB); Cut (Small Room) EQ 25-288Hz (-6dB) / 19-340Hz (-10dB)

Inputs: (1) Balanced XLR; (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered

Dimensions (HxWxD): 618 x 570 x 575mm

Weight: 57.3 kg

Available finishes: Matte Black


**MODEL R18s Matte Black**
**£4,166.67**
**£5,000.00**
**MODEL R15s**

Amplifier: 1.0kW rms

Driver complement: 380mm, Glass fibre diaphragm +/-23.7mm linear excursion

Reference sensitivity: 92dB /150mV/ 1.0m

Frequency Response: THX EQ 20-388Hz (-6dB) / 16-468Hz (-10dB);

Boost (Large Room) EQ 16-388Hz (-6dB) / 14-468Hz (-10dB); Cut (Small Room) EQ 25-388Hz (-6dB) / 19-468Hz (-10dB)

Inputs: (1) Balanced XLR; (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered

Dimensions (HxWxD): 498 x 460 x 465mm

Weight: 35.5 kg

Available finishes: Matte Black


**MODEL R15s Matte Black**
**£3,333.33**
**£4,000.00**

**Retail Price List - Valid From June 2026**
**R-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**MODEL R12s**

Amplifier: 1.0kW rms  
 Driver complement: 300mm, Glass fibre diaphragm +/-23.7mm linear excursion  
 Reference sensitivity: 90dB /150mV/ 1.0m  
 Frequency Response: THX EQ 20-296Hz (-6dB) / 16-380Hz (-10dB);  
 Boost (Large Room) EQ 16-296Hz (-6dB) / 14-380Hz (-10dB); Cut (Small Room) EQ 25-296Hz (-6dB) / 19-380Hz (-10dB)  
 Inputs: (1) Balanced XLR; (1) Unbalanced RCA  
 Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered  
 Dimensions (HxWxD): 428 x 390 x 375mm  
 Weight: 26.7 kg  
 Available finishes: Matte Black


**MODEL R12s Matte Black**
**£2,500.00**
**£3,000.00**
**MODEL R10s**

Amplifier: 750W rms  
 Driver complement: 250mm, Glass fibre diaphragm +/-20.0mm linear excursion  
 Reference sensitivity: 88dB /150mV/ 1.0m  
 Frequency Response: THX EQ 20-301Hz (-6dB) / 16-380Hz (-10dB);  
 Boost (Large Room) EQ 16-301Hz (-6dB) / 14-380Hz (-10dB); Cut (Small Room) EQ 25-301Hz (-6dB) / 19-380Hz (-10dB)  
 Inputs: (1) Balanced XLR; (1) Unbalanced RCA  
 Outputs: (1) Balanced XLR unbuffered; (1) Unbalanced RCA unbuffered  
 Dimensions (HxWxD): 388 x 340 x 380mm  
 Weight: 21.0 kg  
 Available finishes: Matte Black


**MODEL R10s Matte Black**
**£1,833.33**
**£2,200.00**

**Retail Price List - Valid From June 2026**
**R-Series Subwoofers (single)**
**RETAIL**  
ex VAT

**RETAIL**  
inc VAT

**Model R8s**

Amplifier: 600W rms

Driver complement: 215 mm (8"), Carbon fibre diaphragm

Reference sensitivity: 86 dB /150mV/ 1.0m

Frequency Response: THX EQ: 20-265Hz (-6dB)/16-330Hz (-10dB), Boost (Large Room): 16-265Hz (-6dB)/14-330Hz (-10dB), EQ Cut (Small Room): EQ 25-265Hz (-6dB)/19-330Hz (-10dB)

Inputs: (1) Balanced XLR, (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2

Dimensions overall (HxWxD): 268 x 270 x 290mm

Weight: 14.4 kg

Finishes: Matte black


**MODEL R8s Matte Black**
**£1,333.33**
**£1,600.00**
**Perlisten R18is In-Room/IW/OW subwoofer/amp**

**Incorporating a proprietary, versatile vibration isolation mounting solution and driven by Perlisten's DSP1500A 1.5kW amplifier and custom DSP, now with the addition of a digital input. Housed in a hybrid aluminium/steel chassis and front facing 2.8" color touchscreen, the amp can be conveniently located on display in-room or hidden away in a separate room with other rack mounted components.**

Amplifier: 1500W rms

Driver complement: 460 mm (18"), Carbon fibre diaphragm

Reference sensitivity: TBD dB /150mV/ 1.0m

Frequency Response: THX EQ: 20-280Hz (-6dB)/16-345Hz (-10dB), Boost (Large Room): 16-280Hz (-6dB)/14-345Hz (-10dB), EQ Cut (Small Room): EQ 25-280Hz (-6dB)/19-345Hz (-10dB)

Inputs: (1) Balanced XLR, (1) Unbalanced RCA

Outputs: (1) Balanced XLR unbuffered, (1) Unbalanced RCA unbuffered, (1) Digital AES/2

Subwoofer Dimensions overall (HxWxD): 1000.0 x 508.0 x 306.0mm (without brackets)

Amplifier Dimensions overall (HxWxD): 89.0 x 429.2 x 322.4mm

Weight: subwoofer 68.9 kg, amplifier 6.1 kg


**MODEL R18is Matte Black**
**£4,583.33**
**£5,500.00**

**Retail Price List - Valid From June 2026**

Accessories				RETAIL ex VAT	RETAIL inc VAT
SSLR-HGB	S Series stand L/R pair			£1,250.00	£1,500.00
SSC-HGB	S Series Centre stand			£625.00	£750.00
RSLR-HGB	R Series Stand L/R pair			£1,125.00	£1,350.00
RSC-HGB	R Series Centre stand			£541.67	£650.00
R/S-BRCKT	S/R Series wall bracket up to 25kg			£50.00	£60.00
Grille D215s				£158.33	£190.00
Grille D212s				£141.67	£170.00
Grille D15s				£100.00	£120.00
Grille D12s				£95.83	£115.00
Grille R212s				£133.33	£160.00
Grille R210s				£125.00	£150.00
Grille R18s				£116.67	£140.00
Grille R15s				£100.00	£120.00
Grille R12s				£95.83	£115.00
Grille R10s				£87.50	£105.00
Grille R8s				£75.00	£90.00
Grille R-Ser	R Series round grille			£45.83	£55.00
PCK-7i	Pre Install Kit			£125.00	£150.00
PCK -5i	Pre Install Kit			£125.00	£150.00
PCK- 4i	Pre Install Kit			£125.00	£150.00
PCK- 3ic	Pre Install Kit			£125.00	£150.00